


ULTRALIFE XENON

DRAWINGS (mm)

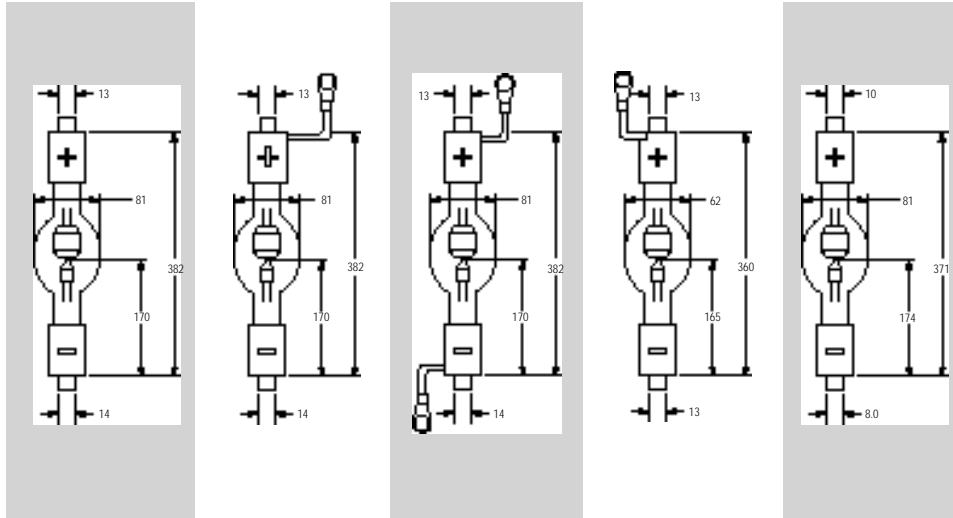

PART NUMBER	XM4200H/V	XM4200H/VC	XM4200H/VCC	XM4200-5H/VC	XM4500HS
SPECIFICATIONS					
POWER (W)	4200	4200	4200	4200	4500
CURRENT(A)	140	140	140	140	140
VOLTAGE (V)	30	30	30	30	32
IGN. VOLTAGE (V)	30K	30K	30K	30K	30K
MINIMUM OPEN CIRCUIT VOLTAGE(V)	100+	100+	100+	100+	100+
AVERAGE LUMEN OUTPUT	190,000	190,000	190,000	190,000	190,000
AVERAGE LIFE (HOURS)	1250	1250	1250	1500	1250
MIN/MAX CURRENT(A)	125/140	125/140	125/140	125/140	130/145
ARC GAP(mm)	7.2	7.2	7.2	7.2	7.2

CROSS REFERENCE					
OSRAM	-	XBO 4200 W/CAOFR	XBO 4200 W/CAOFR	-	XBO 4000 W/HS OFR
USHIO	-	-	-	UXL-3601HK-0	UXL-40S
CHRISTIE	-	CXL-4200A	CXL-4200	-	CXL-40SC
TOSHIBA	-	-	-	XD3600/H-OL	-
HANOVIA	-	-	XH4200VW	-	-
WACOM	-	-	-	KXL3600CF	-
MISC	-	-	-	FXL3600H/OL	CSX 4000HSC