


Rectifying Valve

TYPE M.R.2

(Nickel Electrodes)

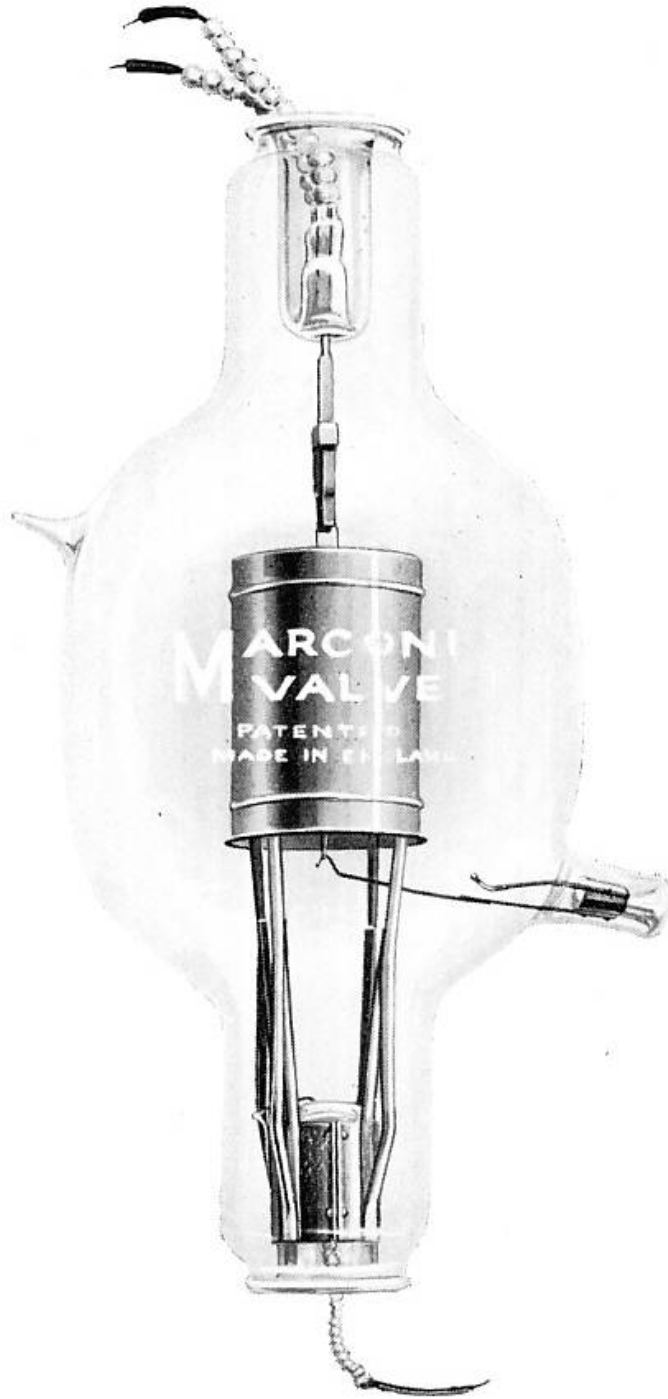

3070

(Approximate overall dimensions : 415 × 180 m/m.)

Normal output 200 milliamperes mean anode current at 10,000 volts when used in a Bi-phase rectifying circuit in which a moderate degree of smoothing is employed.



Continuous anode dissipation permissible in operation 300 watts.

Approximate Data :

Filament volts	17.0	Total emission (milliamps.)	1,000
Filament amperes	15.0	*Impedance (ohms)	1,000
Anode volts	10,000		

* Taken about anode volts 300.

Code Word : IVNAI

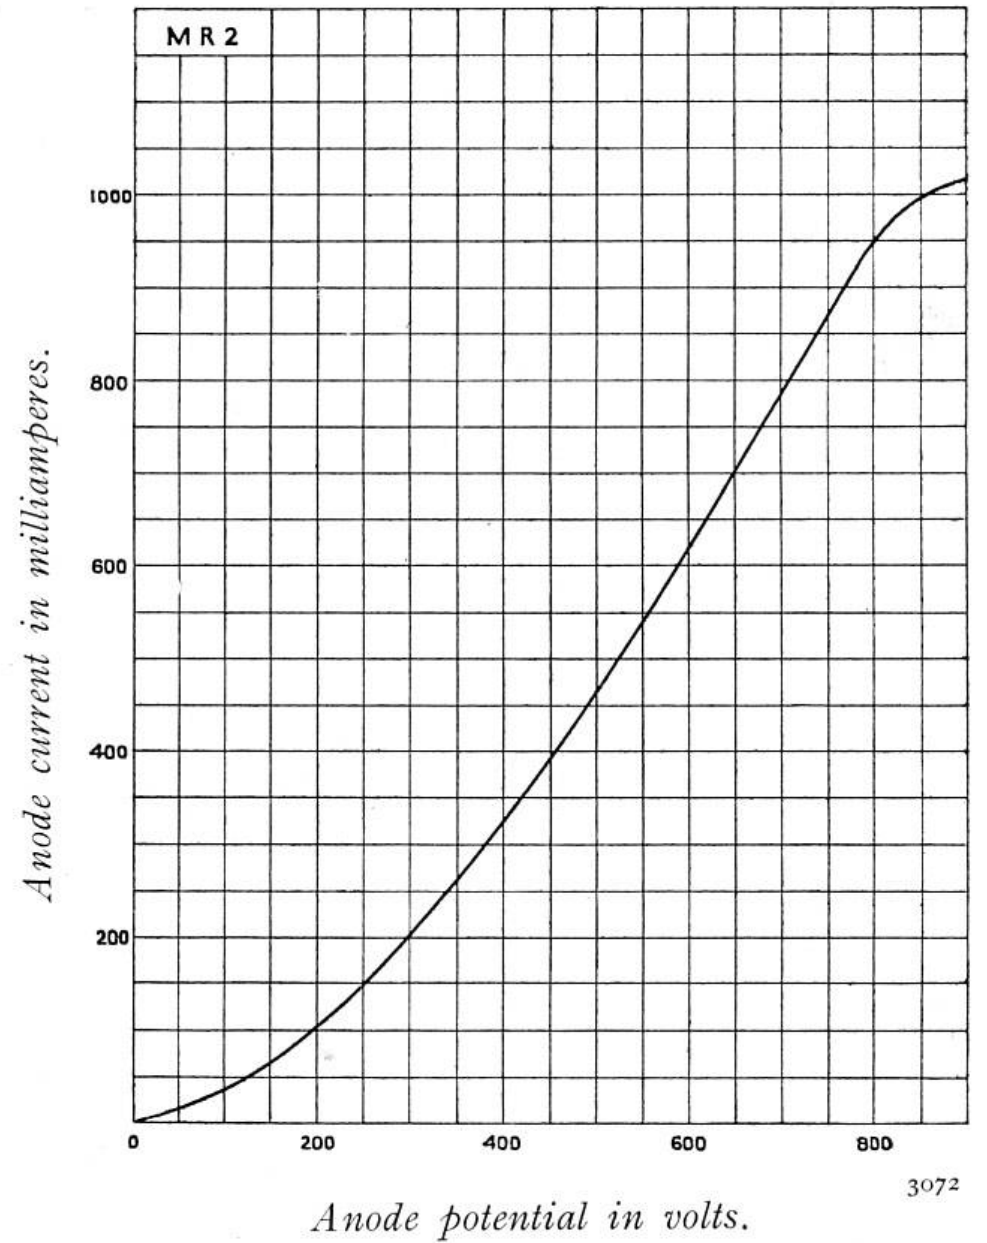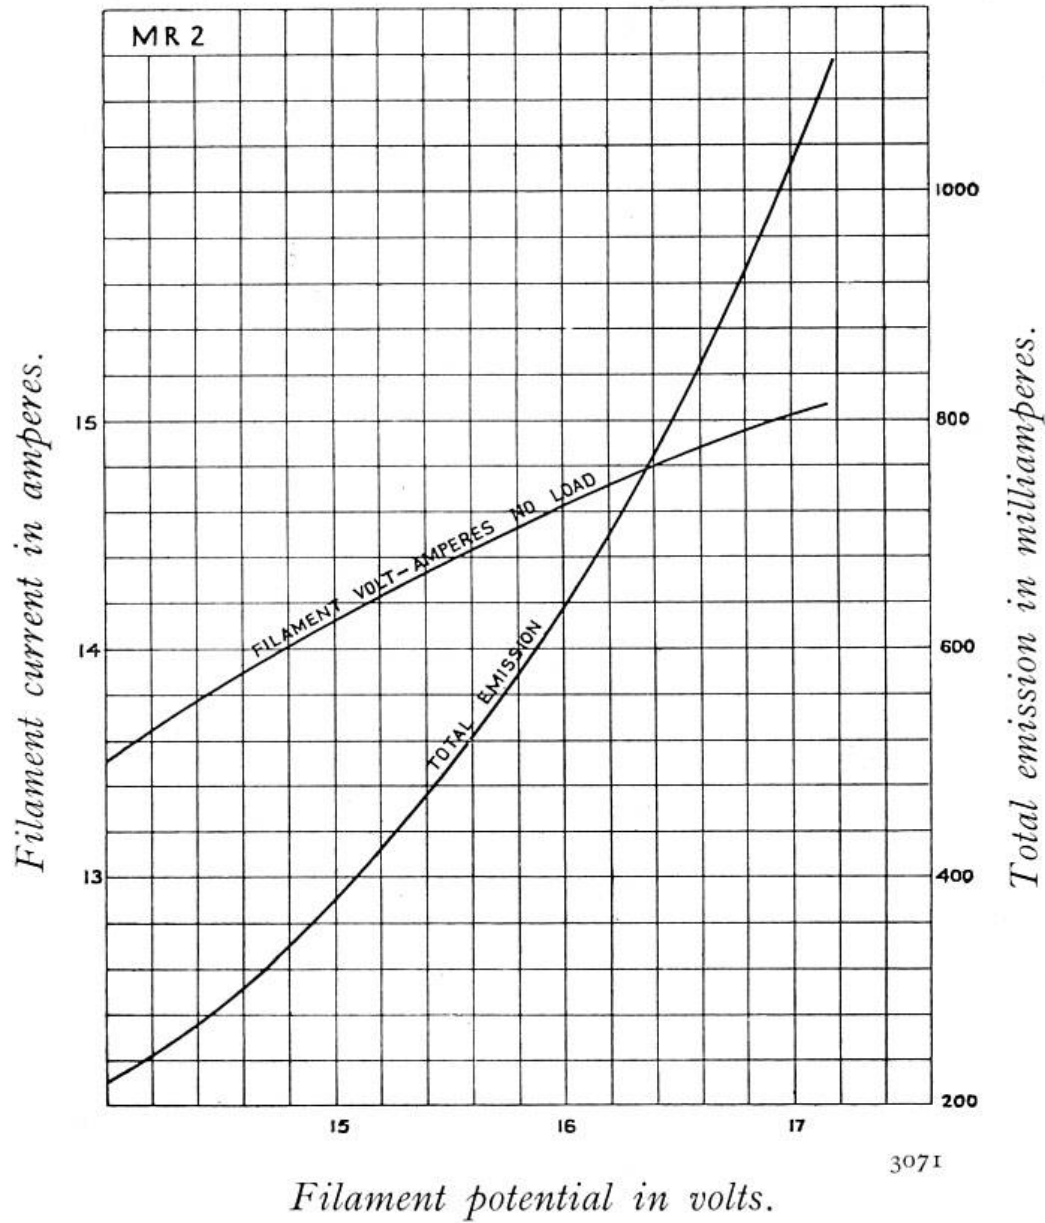

Characteristic Curves of Average Valve.

TYPE M.R.2