


# Rectifying Valve

TYPE M.R.7A

(Molybdenum Electrodes)

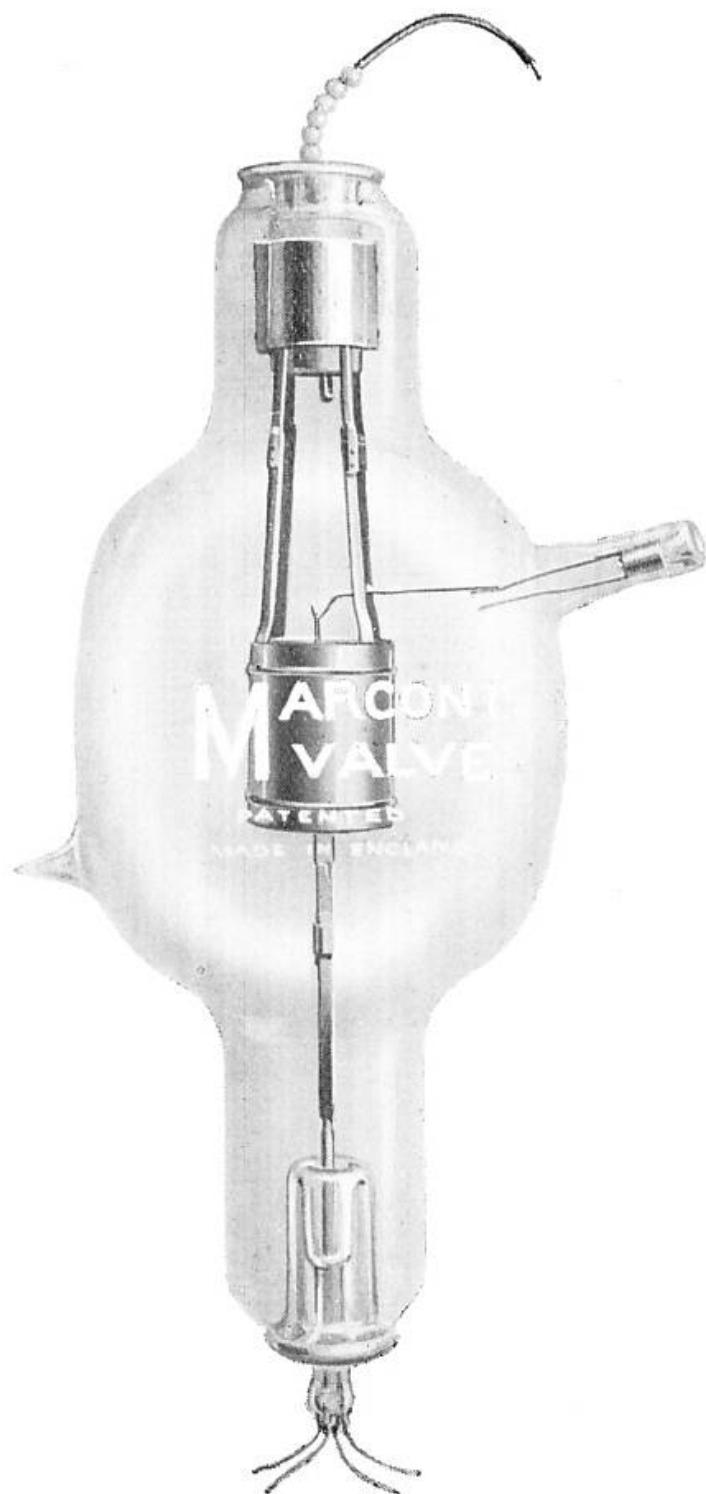

2460A

(Approximate overall dimensions : 465 × 180 m/m.)

Normal output 350 milliamperes mean anode current at 10,000 volts when used in a Bi-phase rectifying circuit in which a moderate degree of smoothing is employed.



Continuous anode dissipation permissible in operation 600 watts.

### Approximate Data :

Filament volts .. ..	12.5	Total emission (milliamps.)	1,500
Filament amperes .. ..	24.0	*Impedance (ohms) .. ..	800
Anode volts .. ..	10,000		

\* Taken about anode volts 350.

Code Word : IVNOA.

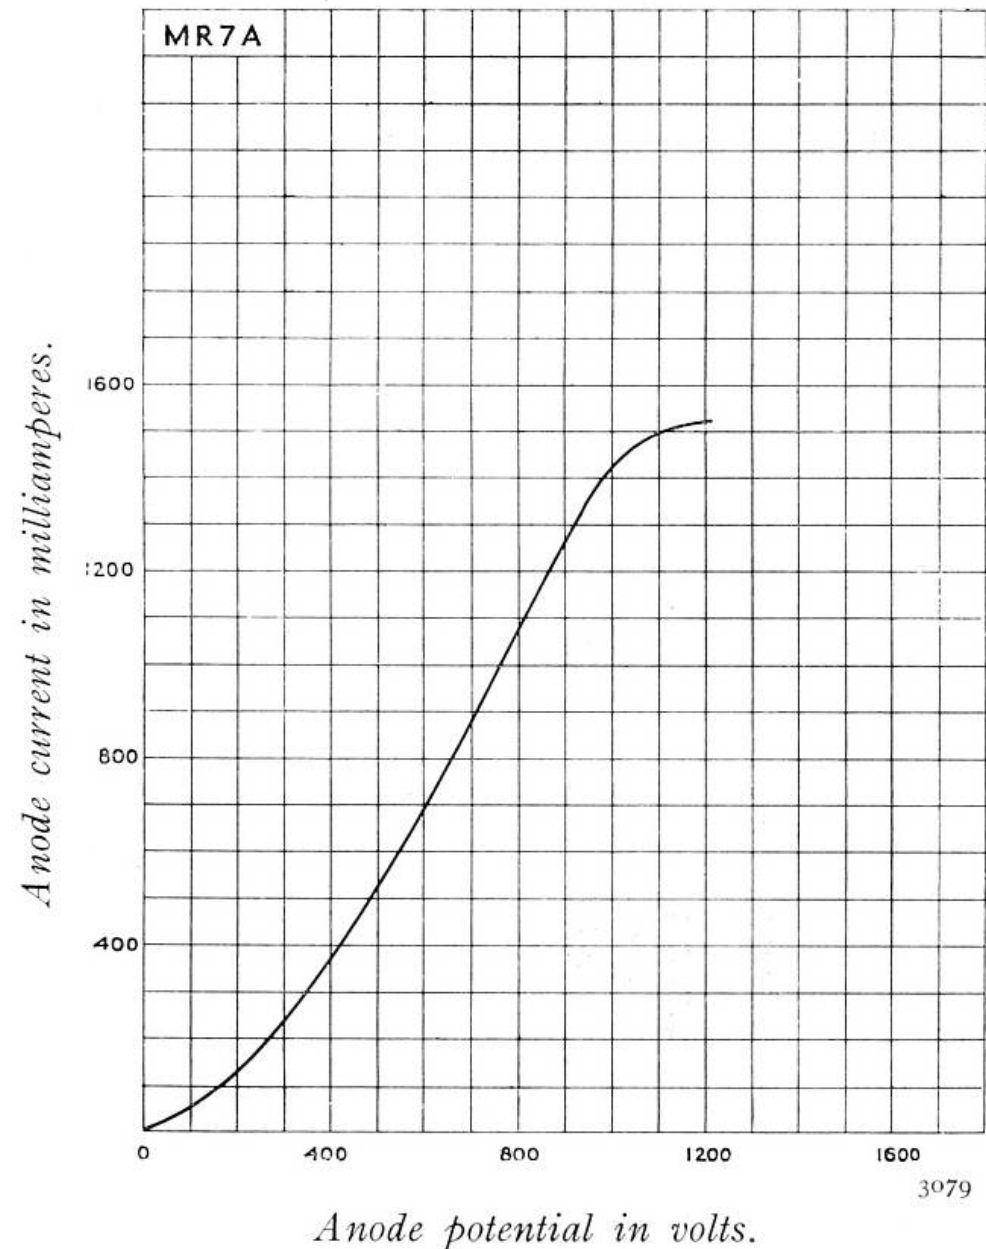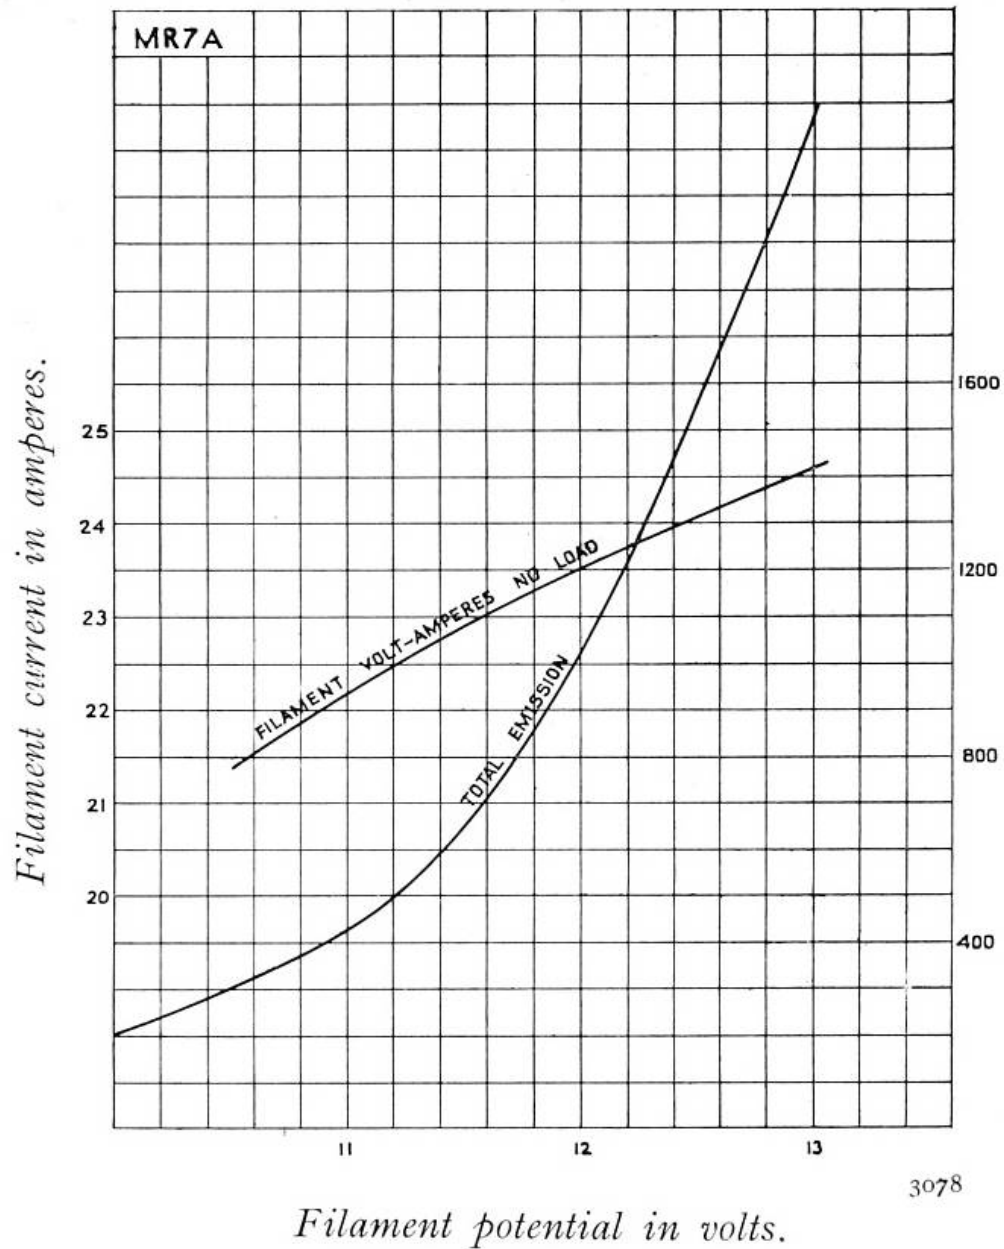

Characteristic Curves of Average Valve.

TYPE M.R.7A