

## R.F. POWER TETRODE

QUICK REFERENCE DATA							
For communication							
$\lambda$	Freq.	C telegr.		$C_{ag_2}$ mod		$C_{g_1}$ mod	
(m)	(MHz)	$V_a$ (V)	$W_o$ (W)	$V_a$ (V)	$W_o$ (W)	$V_a$ (V)	$W_o$ (W)
5	60	5000 4000	1760 1410	4000	1200	4500 4000	400 330
$\lambda$	Freq.	B single side band		$B_{mod}$ <sup>1)</sup>		$V_a$ (V)	$W_o$ (W)
(m)	(MHz)	$V_a$ (V)	$W_o$ (W)			5000 4000	2220 2250
10	30	5000	900			5000 4000	2220 2250
For industrial application R.F. class C							
$\lambda$	Freq.	$\Delta_V$ <sup>2)</sup>		$\Delta$ <sup>3)</sup>			
(m)	(MHz)	$V_{tr}$ (VRMS)	$W_o$ (W)	$V_{tr}$ (VRMS) <sup>4)</sup>	$W_o$ (W)		
5	60	4800	750	4250		1110	

**HEATING** direct; thoriated tungsten filament

Filament voltage  $V_f = 10$  V

Filament current  $I_f = 9.9$  A

**TYPICAL CHARACTERISTICS** at  $I_a = 120$  mA

Amplification factor of grid No.2

with respect to grid No.1

$\mu_{g_2g_1} = 9.5$

Mutual conductance

$S = 7$  mA/V

1) Two tubes

2)  $\Delta_V$  = selfrectification

3)  $\Delta$  = two phase half wave rectification without filter

4) Each phase

**CAPACITANCES**

Grid No.1 to all other elements except anode

 $C_{g1}$  = 24 pF

Anode to all other elements except grid No.1

 $C_a$  = 8.3 pF

Anode to grid No.1

 $C_{ag_1}$  = 0.25 pF**COOLING:** radiation/low-velocity air flow

In order to keep the temperatures below the maximum permitted values it may be necessary to direct an air flow to the seals

**TEMPERATURE LIMITS** (Absolute limits)

Bulb temperature = max. 250 °C

Temperature of anode seal = max. 220 °C

Temperature of pin seals = max. 180 °C




**MECHANICAL DATA**

Base : Super giant Dimensions in mm

Socket : 2422 512 00001

Anode connector: 40626

Net weight : 375 g

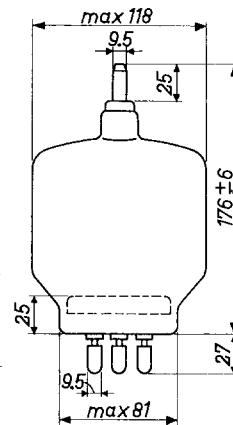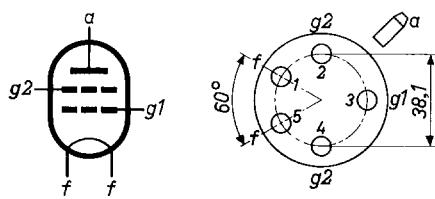

Mounting position: vertical with base up or down

**R.F. CLASS C TELEGRAPHY****LIMITING VALUES** (Absolute limits)

Frequency	f	up to	75	up to	$110^1$ )	MHz
Anode voltage	$V_a$	=	max.	5	max.	4.5
Anode input power	$W_{ia}$	=	max.	2250	max.	1800
Anode dissipation	$W_a$	=		max.	500	
Anode current	$I_a$	=		max.	450	
Grid No.2 voltage	$V_{g_2}$	=		max.	700	
Grid No.2 dissipation	$W_{g_2}$	=		max.	65	
Negative grid No.1 voltage	$-V_{g_1}$	=		max.	500	
Grid No.1 dissipation	$W_{g_1}$	=		max.	25	

**OPERATING CONDITIONS**

Frequency	f	$\leq$	60	60	60	60	MHz
Anode voltage	$V_a$	=	5	5	4	4	kV
Grid No.2 voltage	$V_{g_2}$	=	600	700	600	700	V
Grid No.1 voltage	$V_{g_1}$	=	-200	-200	-200	-200	V
Anode current	$I_a$	=	440	440	450	450	mA
Grid No.2 current	$I_{g_2}$	=	80	75	90	85	mA
Grid No.1 current	$I_{g_1}$	=	35	25	39	27	mA
Peak grid No.1 voltage	$V_{g_1\text{ p}}$	=	350	340	350	340	V
Anode input power	$W_{ia}$	=	2200	2200	1800	1800	W
Grid No.1 input power	$W_{ig_1}$	=	12	8	14	8.5	W
Grid No.2 dissipation	$W_{g_2}$	=	48	52.5	54	59.5	W
Anode dissipation	$W_a$	=	440	440	390	390	W
Output power	$W_o$	=	1760	1760	1410	1410	W
Efficiency	$\eta$	=	80	80	78	78	%

<sup>1)</sup> See page E57.

**R.F. CLASS C ANODE AND SCREEN GRID MODULATION**

Screen grid modulated via a choke of 2 H

**LIMITING VALUES** (Absolute limits)

Frequency	f	up to	75	MHz
Anode voltage	V <sub>a</sub>	=	max.	4 kV
Anode input power	W <sub>ia</sub>	=	max.	1600 W
Anode dissipation	W <sub>a</sub>	=	max.	330 W
Anode current	I <sub>a</sub>	=	max.	400 mA
Grid No.2 voltage	V <sub>g2</sub>	=	max.	700 V
Grid No.2 dissipation	W <sub>g2</sub>	=	max.	50 W
Negative grid No.1 voltage	-V <sub>g1</sub>	=	max.	500 V
Grid No.1 dissipation	W <sub>g1</sub>	=	max.	25 W

**OPERATING CONDITIONS**

Frequency	f	$\leq$	60	MHz
Anode voltage	V <sub>a</sub>	$\approx$	4	kV
Grid No.2 voltage	V <sub>g2</sub>	$\approx$	600	V
Grid No.1 voltage	V <sub>g1</sub>	$\approx$	-240	V
Peak grid No.2 voltage	V <sub>g2p</sub>	$\approx$	340	V
Peak grid No.1 voltage	V <sub>g1p</sub>	$\approx$	415	V
Anode current	I <sub>a</sub>	$\approx$	380	mA
Grid No.2 current	I <sub>g2</sub>	$\approx$	80	mA
Grid No.1 current	I <sub>g1</sub>	$\approx$	20	mA
Anode input power	W <sub>ia</sub>	$\approx$	1520	W
Grid No.1 input power	W <sub>ig1</sub>	$\approx$	7.5	W
Grid No.2 dissipation	W <sub>g2</sub>	$\approx$	48	W
Anode dissipation	W <sub>a</sub>	$\approx$	320	W
Output power	W <sub>o</sub>	$\approx$	1200	W
Efficiency	$\eta$	$\approx$	79	%
Modulation factor	m	$\approx$	100	%
Modulation power	W <sub>mod</sub>	$\approx$	760	W

**R.F. CLASS C CONTROL GRID MODULATION****LIMITING VALUES** (Absolute limits)

Frequency	f	up to	75	MHz
Anode voltage	$V_a$	=	max.	5000 V
Anode input power	$W_{ia}$	=	max.	1000 W
Anode dissipation	$W_a$	=	max.	500 W
Anode current	$I_a$	=	max.	225 mA
Grid No.2 voltage	$V_{g2}$	=	max.	700 V
Grid No.2 dissipation	$W_{g2}$	=	max.	50 W
Negative grid No.1 voltage	$-V_{g1}$	=	max.	500 V

**OPERATING CONDITIONS**

Frequency	f	$\leq$	60	60 MHz
Anode voltage	$V_a$	=	4500	4000 V
Grid No.2 voltage	$V_{g2}$	=	600	600 V
Grid No.1 voltage <sup>1)</sup>	$V_{g1}$	=	-180	-180 V
Grid No.1 circuit resistance	$R_{g1}$	=	1400	1400 $\Omega$
Peak grid No.1 voltage	$V_{g1\ p}$	=	220	210 V
Anode current	$I_a$	=	200	200 mA
Grid No.2 current	$I_{g2}$	=	5	5 mA
Grid No.1 current	$I_{g1}$	=	6.5	6.5 mA
Grid No.1 input power	$W_{ig1}$	=	1.3	1.2 W
Anode input power	$W_{ia}$	=	900	800 W
Anode dissipation	$W_a$	=	500	470 W
Grid No.2 dissipation	$W_{g2}$	=	3	3 W
Output power	$W_o$	=	400	330 W
Efficiency	$\eta$	=	44.5	41 %
Modulation factor	$m$	=	100	100 %
Peak grid No.1 modulation voltage	$V_{g1\ mod_p}$	=	100	100 V
Grid No.1 current <sup>2)</sup>	$I_{g1}$	=	26	27 mA
Grid No.1 input power <sup>2)</sup>	$W_{ig1}$	=	5	5 W

<sup>1)</sup> With -170 V from fixed bias supply included<sup>2)</sup> At crest of modulation

## R.F. CLASS B SINGLE SIDE BAND AMPLIFIER

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	=	max.	5000 V
Anode input power	$W_{ia}$	=	max.	2250 W
Anode dissipation	$W_a$	=	max.	500 W
Anode current	$I_a$	=	max.	450 mA
Grid No.2 voltage	$V_{g2}$	=	max.	700 V
Grid No.2 dissipation	$W_{g2}$	=	max.	65 W
Grid No.1 circuit resistance	$R_{g1}$	=	max.	50 kΩ

## OPERATING CONDITIONS

Frequency	f	≤	30	MHz
Anode voltage	$V_a$	=	5000	V
Grid No.2 voltage	$V_{g2}$	=	700	V
Grid No.1 voltage	$V_{g1}$	=	-90	V
		zero signal	single tone signal	
Peak grid No.1 voltage	$V_{g1p}$	=	0	130 V
Anode current	$I_a$	=	56	280 mA
Grid No.2 current	$I_{g2}$	=	0	25 mA
Grid No.1 current	$I_{g1}$	=	0	1 mA
Grid No.1 input power	$W_{ig1}$	=	0	1 W
Anode input power	$W_{ia}$	=	280	1400 W
Anode dissipation	$W_a$	=	280	500 W
Grid No.2 dissipation	$W_{g2}$	=	0	18 W
Output power	$W_o$	=	0	900 W
Efficiency	$\eta$	=	-	64.5 %

## R.F. CLASS C AMPLIFIER FOR INDUSTRIAL USE with self rectification

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	75	MHz
Anode transformer voltage <sup>1)</sup>	$V_{tr\ a}$	= max.	5600	V(RMS)
Anode input power	$W_{ia}$	= max.	1460	W
Anode dissipation	$W_a$	= max.	500	W
Anode current	$I_a$	= max.	240	mA
Grid No.2 transformer voltage <sup>1)</sup>	$V_{tr\ g_2}$	= max.	780	V(RMS)
Grid No.2 dissipation	$W_{g_2}$	= max.	65	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	500	V
Grid No.1 current	$I_{g_1}$	= max.	25	mA
Grid No.1 circuit resistance	$R_{g_1}$	= max.	50	kΩ

OPERATING CONDITIONS <sup>2)</sup>

Frequency	f	$\leq$	60	MHz
Anode transformer voltage <sup>1)</sup>	$V_{tr\ a}$	=	4800	V(RMS)
Grid No.2 transformer voltage <sup>1)</sup>	$V_{tr\ g_2}$	=	670	V(RMS)
Grid No.1 resistor	$R_{g_1}$	=	16	kΩ
Peak grid No.1 voltage	$V_{g_1\ p}$	=	350	V
Anode current	$I_a$	=	200	mA
Grid No.2 current	$I_{g_2}$	=	32	mA
Grid No.1 current	$I_{g_1}$	=	11	mA
Grid No.1 input power	$W_{ig_1}$	=	3.5	W
Anode input power	$W_{ia}$	=	1060	W
Anode dissipation	$W_a$	=	310	W
Grid No.2 dissipation	$W_{g_2}$	=	24	W
Output power	$W_o$	=	750	W
Efficiency	$\eta$	=	71	%

1)  $V_{tr\ a}$  and  $V_{tr\ g_2}$  are the anode transformer secondary voltage per phase and the screen grid transformer secondary voltage per phase respectively.

2) Under these conditions normal deviations of voltages and load are permissible. The absolute limiting values of the tube must, however, not be exceeded.

**R.F. CLASS C AMPLIFIER FOR INDUSTRIAL USE**

with anode voltage from two-phase half-wave rectifier without filter

**LIMITING VALUES (Absolute limits)**

Frequency	f	up to	75	MHz
Anode transformer voltage <sup>1)</sup>	V <sub>tra</sub>	=	max.	5000 V(RMS)
Anode input power	W <sub>ia</sub>	=	max.	2250 W
Anode dissipation	W <sub>a</sub>	=	max.	500 W
Anode current	I <sub>a</sub>	=	max.	400 mA
Grid No.2 transformer voltage <sup>1)</sup>	V <sub>trg2</sub>	=	max.	700 V(RMS)
Grid No.2 dissipation	W <sub>g2</sub>	=	max.	65 W
Negative grid No.1 voltage	-V <sub>g1</sub>	=	max.	500 V
Grid No.1 dissipation	W <sub>g1</sub>	=	max.	25 W
Grid No.1 current	I <sub>g1</sub>	=	max.	45 mA
Grid No.1 circuit resistance	R <sub>g1</sub>	=	max.	50 kΩ

**OPERATING CONDITIONS<sup>2)</sup>**

Frequency	f	≤	60	MHz
Anode transformer voltage <sup>1)</sup>	V <sub>tra</sub>	=	4250	V(RMS)
Anode voltage D.C. value	V <sub>a</sub>	=	3825	V
Grid No.2 transformer voltage <sup>1)</sup>	V <sub>trg2</sub>	=	600	V(RMS)
Grid No.2 voltage D.C. value	V <sub>g2</sub>	=	540	V
Grid No.1 resistor	R <sub>g1</sub>	=	14	kΩ
Peak grid No.1 voltage	V <sub>g1 p</sub>	=	300	V
Anode current	I <sub>a</sub>	=	325	mA
Grid No.2 current	I <sub>g2</sub>	=	20	mA
Grid No.1 current	I <sub>g1</sub>	=	15	mA
Grid No.1 input power	W <sub>ig1</sub>	=	4	W
Anode input power	W <sub>ia</sub>	=	1535	W
Anode dissipation	W <sub>a</sub>	=	425	W
Grid No.2 dissipation	W <sub>g2</sub>	=	13.3	W
Output power	W <sub>o</sub>	=	1110	W
Efficiency	η	=	72	%

<sup>1)</sup> V<sub>tra</sub> and V<sub>trg2</sub> are the anode transformer secondary voltage per phase and the screen grid transformer secondary voltage per phase respectively.

<sup>2)</sup> Under these conditions normal deviations of voltages and load are permissible. The absolute limiting values of the tube must, however, not be exceeded.

**A.F. CLASS B AMPLIFIER AND MODULATOR****LIMITING VALUES** (Absolute limits)

Anode voltage	$V_a$	=	max.	5000	V
Anode input power	$W_{ia}$	=	max.	2250	W
Anode dissipation	$W_a$	=	max.	500	W
Anode current	$I_a$	=	max.	450	mA
Grid No.2 voltage	$V_{g2}$	=	max.	700	V
Grid No.2 dissipation	$W_{g2}$	=	max.	65	W
Negative grid No.1 voltage	$-V_{g1}$	=	max.	500	V
Grid No.1 current	$I_{g1}$	=	max.	45	mA
Grid No.1 circuit resistance	$R_{g1}$	=	max.	50	kΩ

**OPERATING CONDITIONS**, two tubes

$V_a$	=	5000	4000	4000	V
$V_{g2}$	=	600	600	600	V
$V_{g1}$	=	-62.5	-62.5	-60	V
$R_{aa\sim}$	=	26	20	16	kΩ
$V_{g1g1p}$	=	0      260	0      254	0      305	V
$I_a$	=	2x50      2x290	2x45      2x285	2x55      2x366	mA
$I_{g2}$	=	0      2x43	0      2x40	0      2x60	mA
$I_{g1}$	=	0      2x13	0      2x13.5	0      2x18	mA
$W_{ig1}$	=	0      2x1.5	0      2x1.5	0      2x2.5	W
$W_{ia}$	=	2x250      2x1450	2x180      2x1140	2x220      2x1465	W
$W_a$	=	2x250      2x340	2x180      2x300	2x220      2x340	W
$W_{g2}$	=	0      2x26	0      2x24	0      2x36	W
$W_o$	=	0      2220	0      1680	0      2250	W
$d_{tot}$	=	-      5	-      4.7	-      5	%
$\eta$	=	-      76.5	-      74	-      76.5	%



