

Modulating Valve

TYPE D.E.M.2

(Dull Emitter Type, Molybdenum Electrodes)



3532

(Approximate overall dimensions : 320 × 125 m/m.)

A modulating valve for use in circuits employing low anode voltages. Maximum continuous anode dissipation under modulating conditions 150 watts at 2,500 volts.

Approximate Data :


Filament volts ..	12.5	*Impedance (ohms) ..	1,500
Filament amperes ..	3.0	†Impedance (ohms) ..	2,400
Anode volts D.C.	1,000—2,500	*Amplification factor ..	5

* Taken about anode volts 1,500 and grid volts —200.

† Taken about anode volts 2,300 and grid volts —400.

Code Word : IVPYG

Anode current in milliamperes.

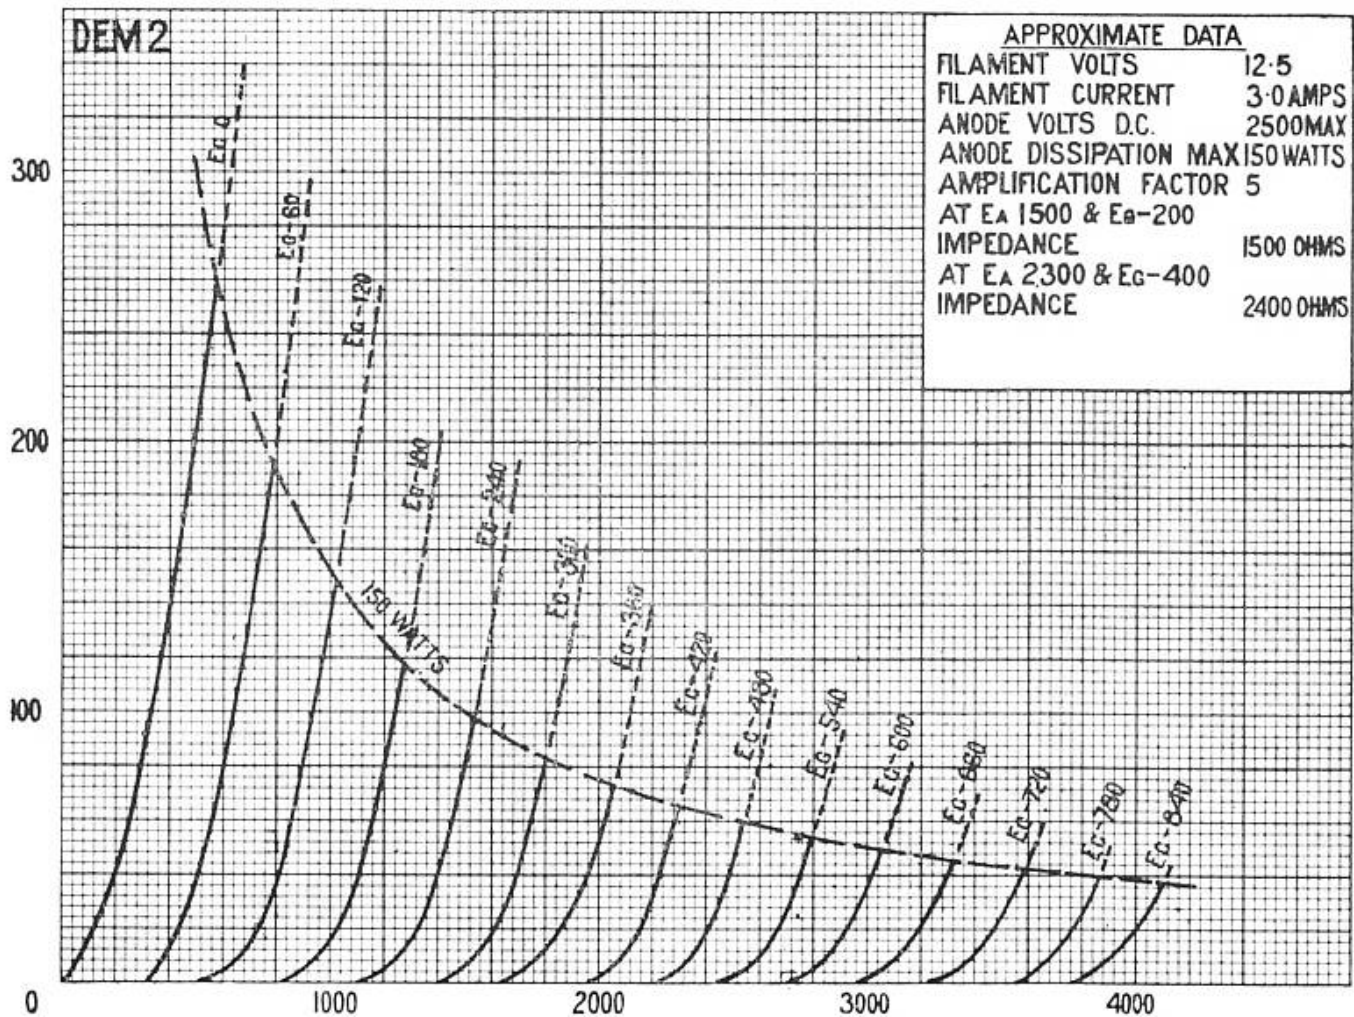

3533

Anode potential in volts.

Characteristic Curves of Average Valve:

TYPE D.E.M.2