

Transmitting Valve

TYPE D.E.T.2

(Dull Emitter Type, Molybdenum Electrodes)



3099

(Approximate overall dimensions : 320 × 125 m/m.)

Normal input 200 milliamperes mean anode current at 2,500 anode volts D.C. when used in a suitable circuit under oscillating conditions on a wavelength not less than 100 metres.

Capable of operating on wavelengths under 100 metres down to 15 metres at reduced anode voltages.


Continuous anode dissipation premissible 150 watts.

Approximate Data :

Filament volts	.. 12.5	*Impedance (ohms) 4,500
Filament amperes	.. 3.0	*Amplification factor 15
Anode volts D.C.	.. 2,500		

* Taken about anode volts 700 and grid volts 0.

Code Word : IVPRE

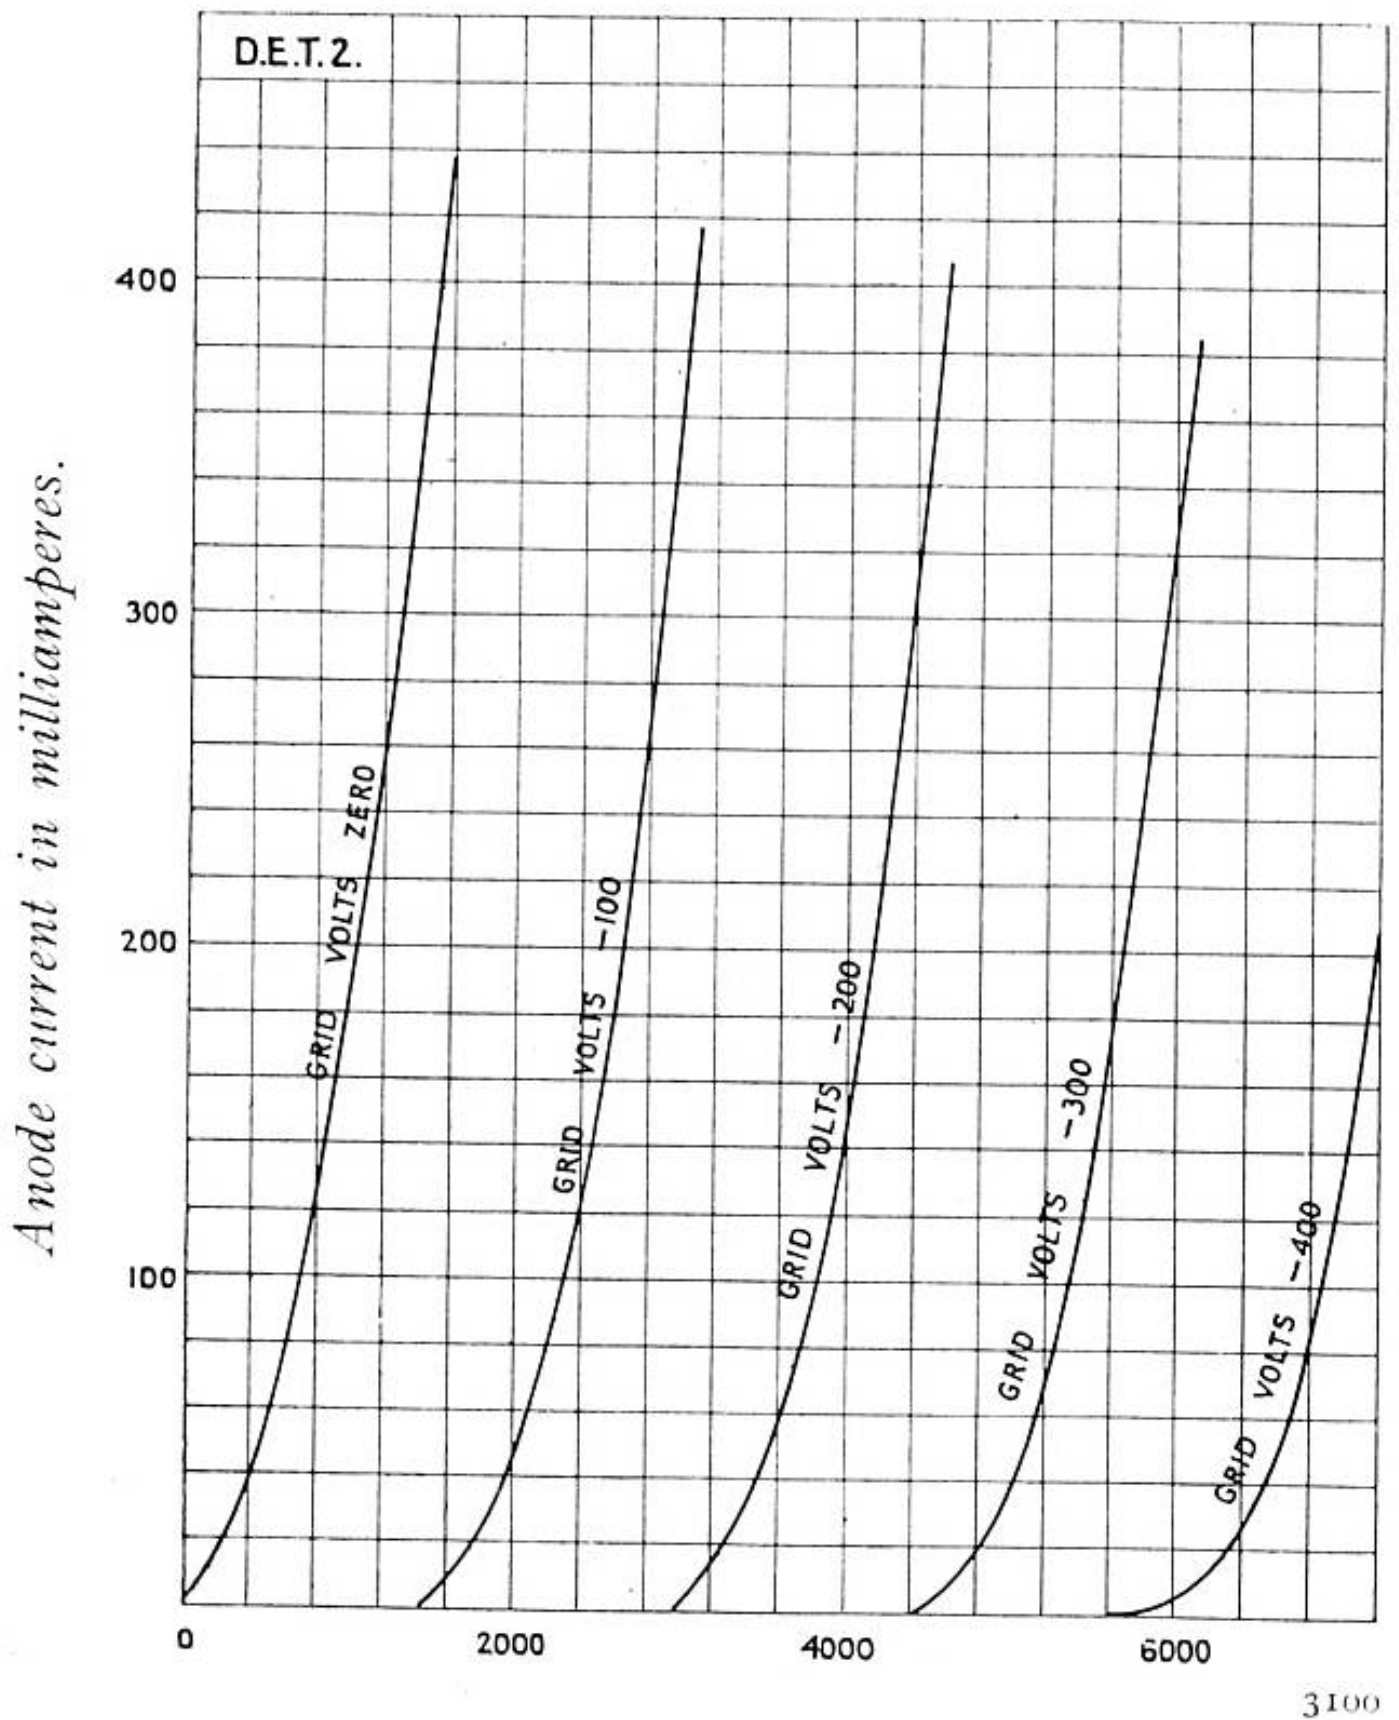

Characteristic Curves of Average Valve.

TYPE D.E.T.2