

Rectifying Valve

TYPE M.R.4

(Nickel Electrodes)



2345A

(Approximate overall dimensions : 250 × 120 m/m.)

A two-electrode rectifying valve, tested dissipating, 300 watts at the anode, suitable for voltages up to 10,000.



Continuous anode dissipation permissible in operation, 150 watts.

Approximate Data :

Filament volts	12.5	Total emission (milliamps.)	400
Filament amperes	6.3	*Impedance (ohms)	1,500
Anode volts	10,000		

* Taken about anode volts 200.

Code Word : IVNEK

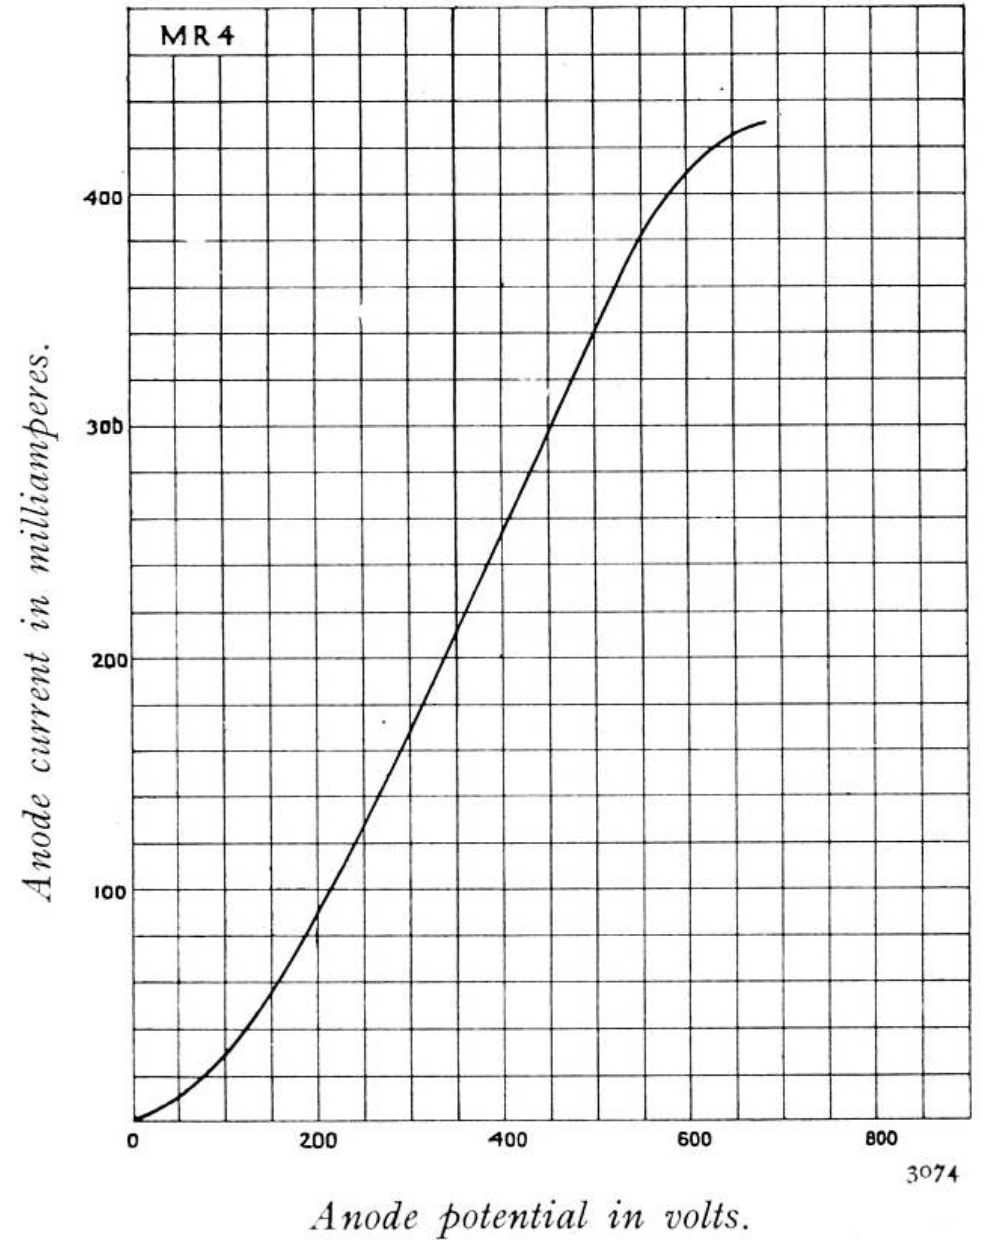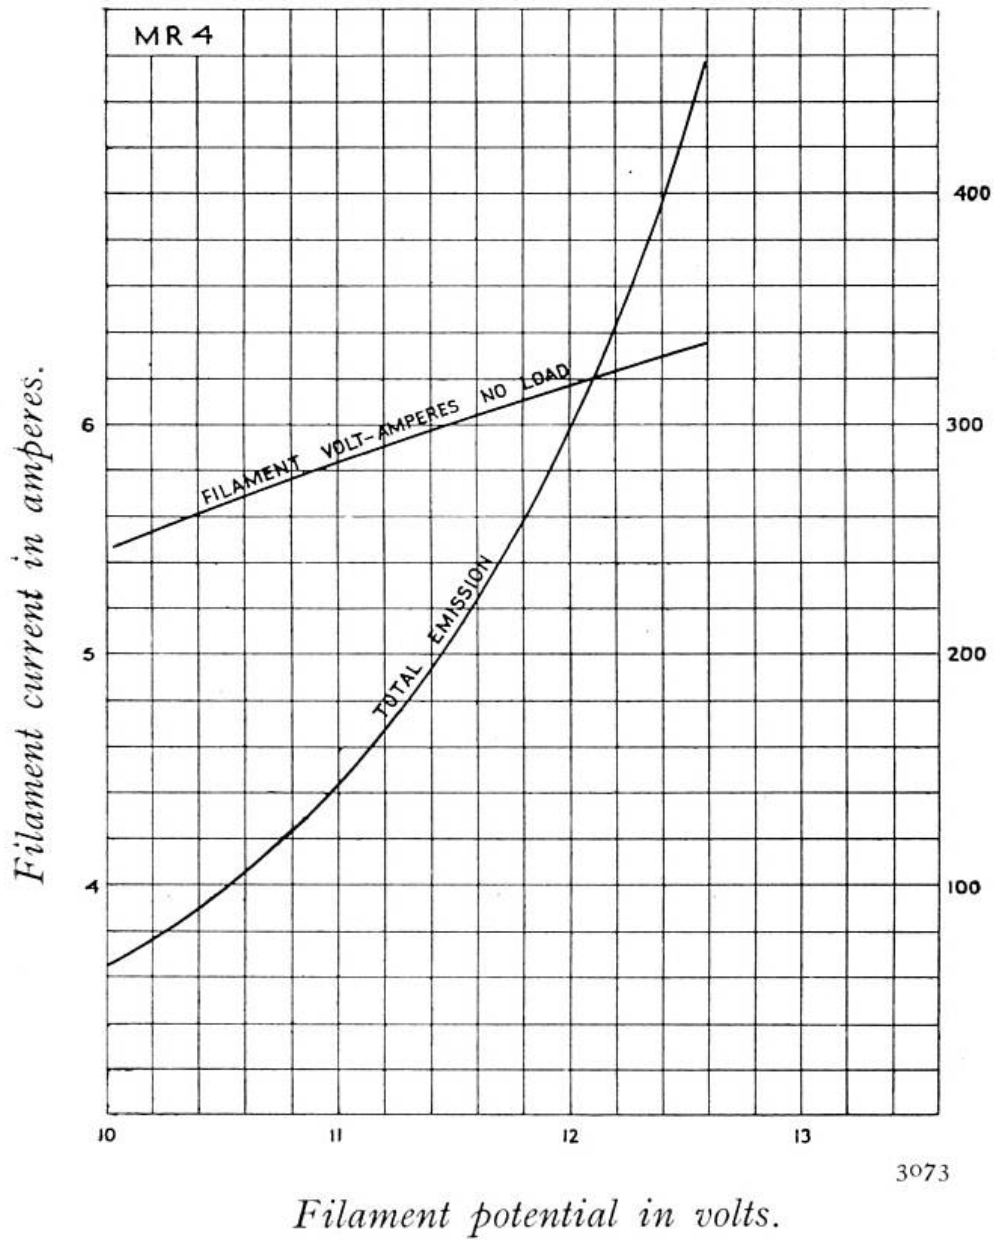

Characteristic Curves of Average Valve.

TYPE M.R.4