


Transmitting Valve

TYPE M.T.II

(Nickel Electrodes)

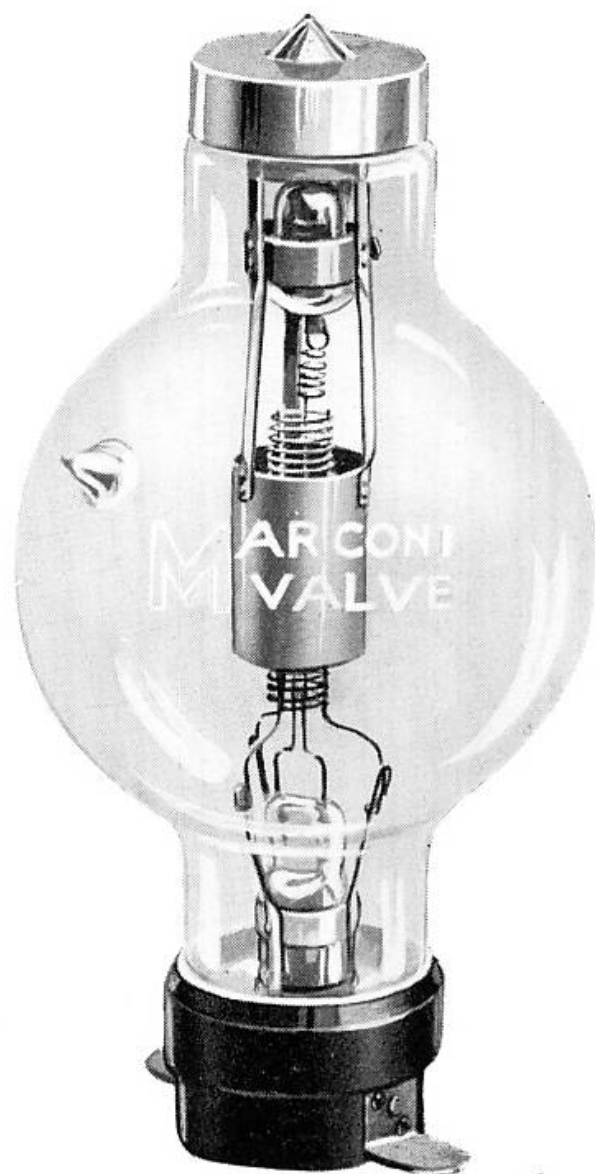

2765

(Approximate overall dimensions : 207×100 m/m.)

Normal input 70 milliamperes mean anode current at 1,000 to 2,000 anode volts D.C. when used in a suitable circuit under oscillating conditions on a long wave telegraphic load in which the method of keying reduces the anode current to zero during spacing.



Continuous anode dissipation permissible under oscillatory conditions 50 watts.

Approximate Data :

Filament volts	10.0	Total emission (milliamps.)	300
Filament amperes	5.5	* Impedance (ohms) ..	15,000
Anode volts D.C. ..	1,000—2,000	* Amplification factor ..	20

* Taken about anode volts 1,000 and grid volts 0.

Code Word : IVIMU

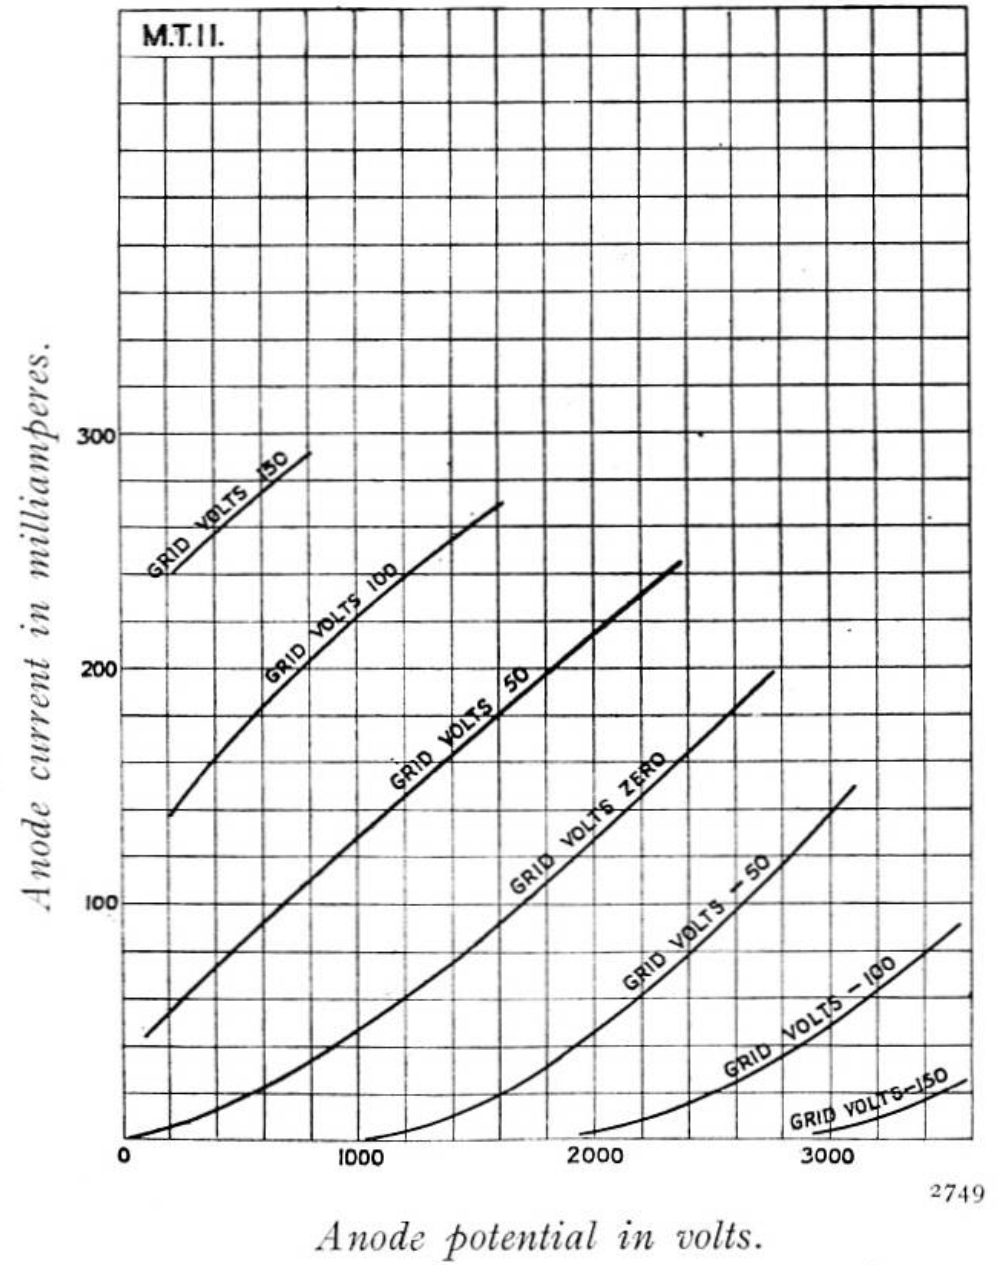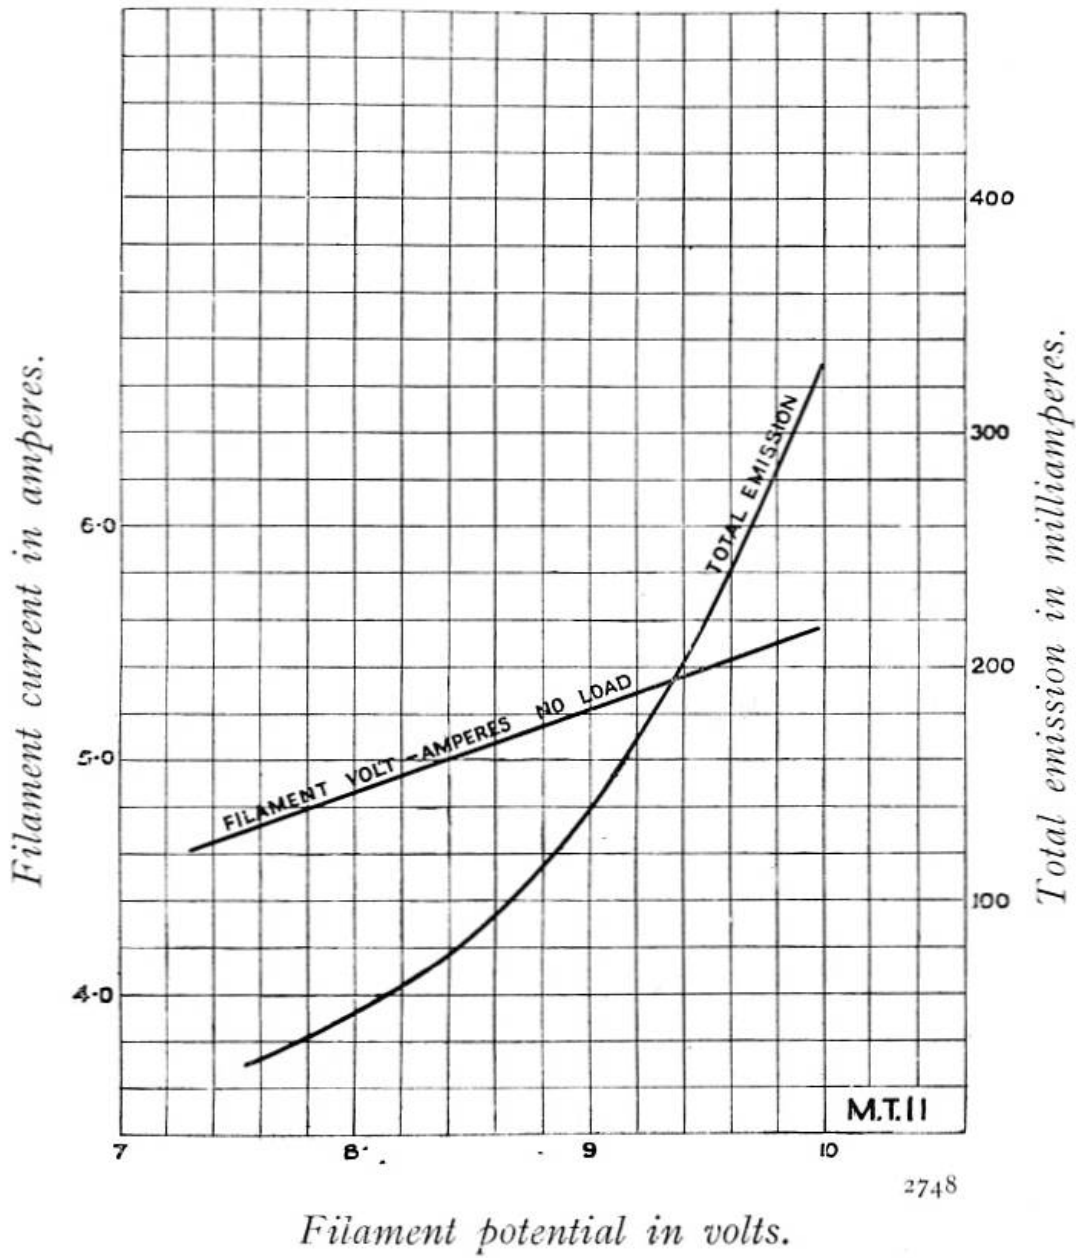

Characteristic Curves of Average Valve.

TYPE M.T.II