


Transmitting Valve

TYPE M.T.2

(Nickel Electrodes)

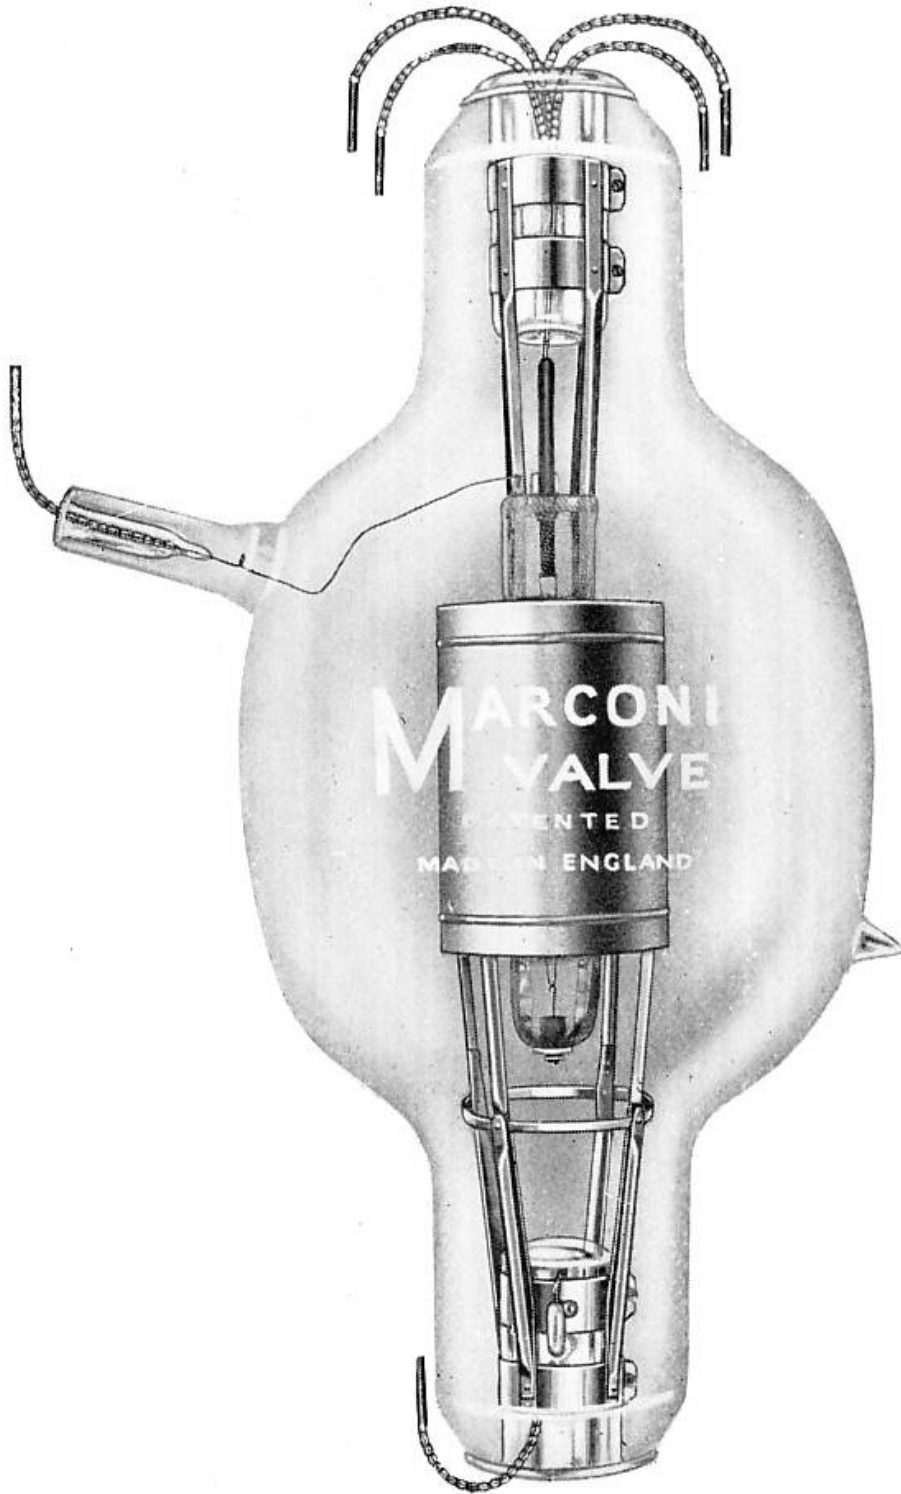

2356A

(Approximate overall dimensions : 440 × 180 m/m.)

Normal input 200 milliamperes mean anode current at 10,000 anode volts D.C. when used in a suitable circuit under oscillating conditions on a long wave telegraphic load in which the method of keying reduces the anode current to zero during spacing.



Continuous anode dissipation permissible under oscillatory conditions 300 watts.

Approximate Data :

Filament volts	17.0	Total emission (milliamps.)	1,000
Filament amperes	15.0	*Impedance (ohms)	100,000
Anode volts D.C.	10,000	*Amplification factor	200

* Taken about anode volts 4,000 and grid volts + 50.

Code Word : IVGEO

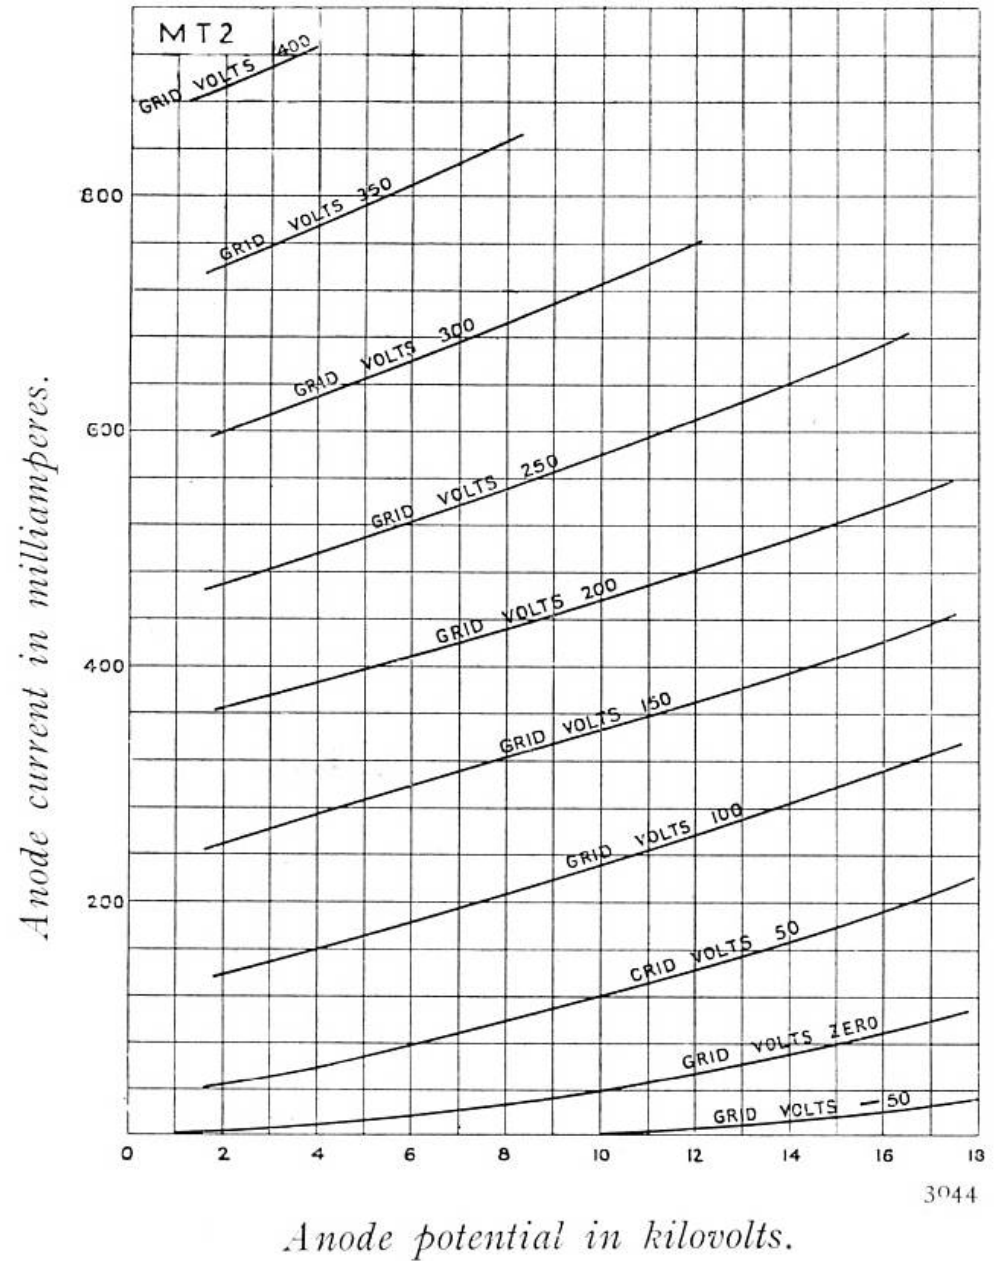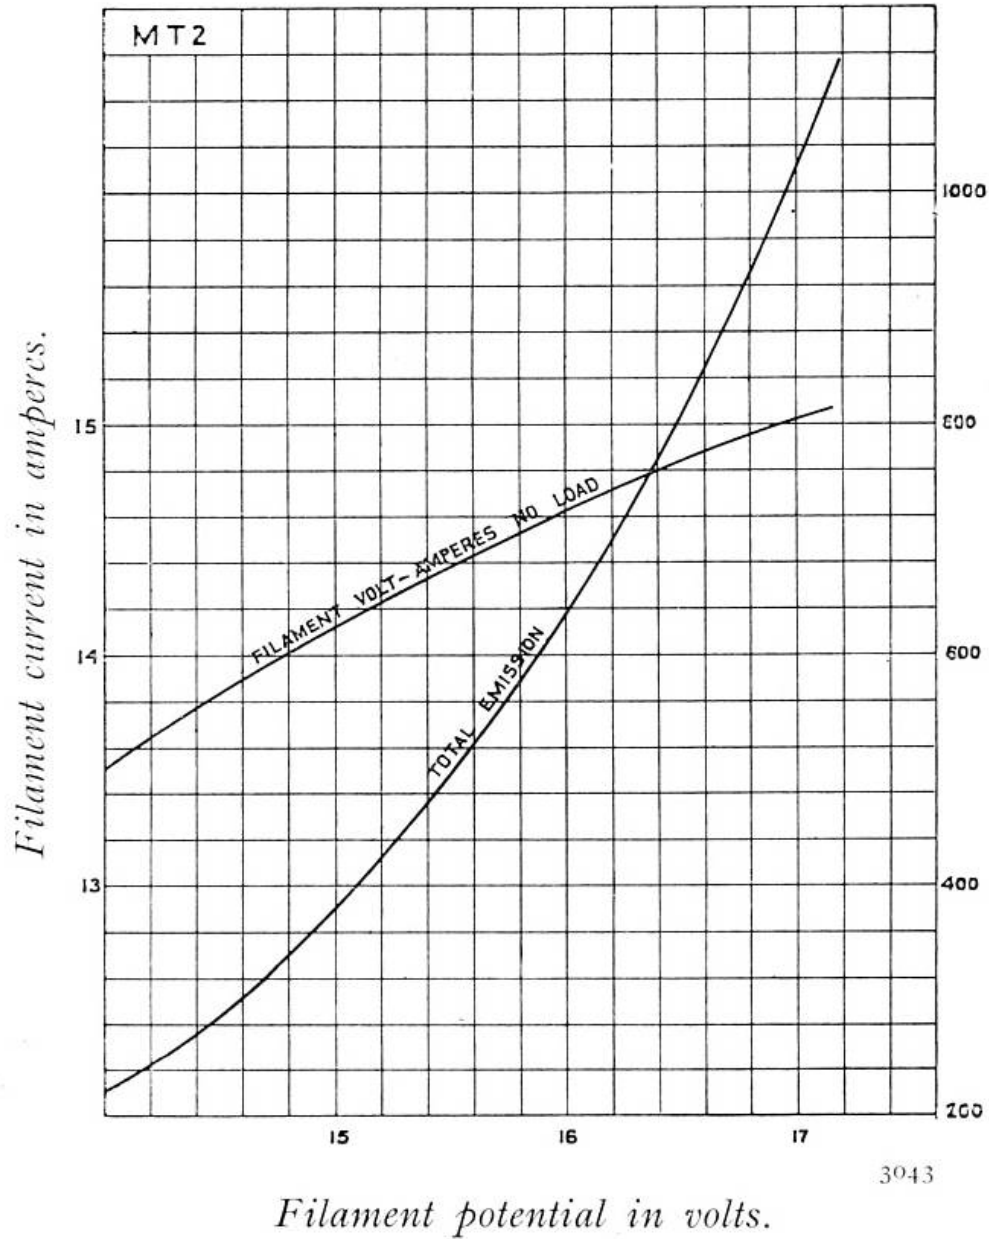

Characteristic Curves of Average Valve.

TYPE M.T.2