

# Transmitting Valve

## TYPE M.T.6

(Nickel Electrodes)



2369A

(Approximate overall dimensions : 380 × 160 m/m.)

Normal input 125 milliamperes mean anode current at 10,000 anode volts D.C. when used in a suitable circuit under oscillating conditions on a long wave telegraphic load in which the method of keying reduces the anode current to zero during spacing.



Continuous anode dissipation permissible under oscillatory conditions 200 watts.

### Approximate Data :

Filament volts .. ..	15.5	Total emission (milliamps.)	600
Filament amperes .. ..	10.0	*Impedance (ohms) .. ..	125,000
Anode volts D.C. .. ..	10,000	*Amplification factor .. ..	150

\* Taken about anode volts 4,000 and grid volts +50.

Code Word : IVHEY.

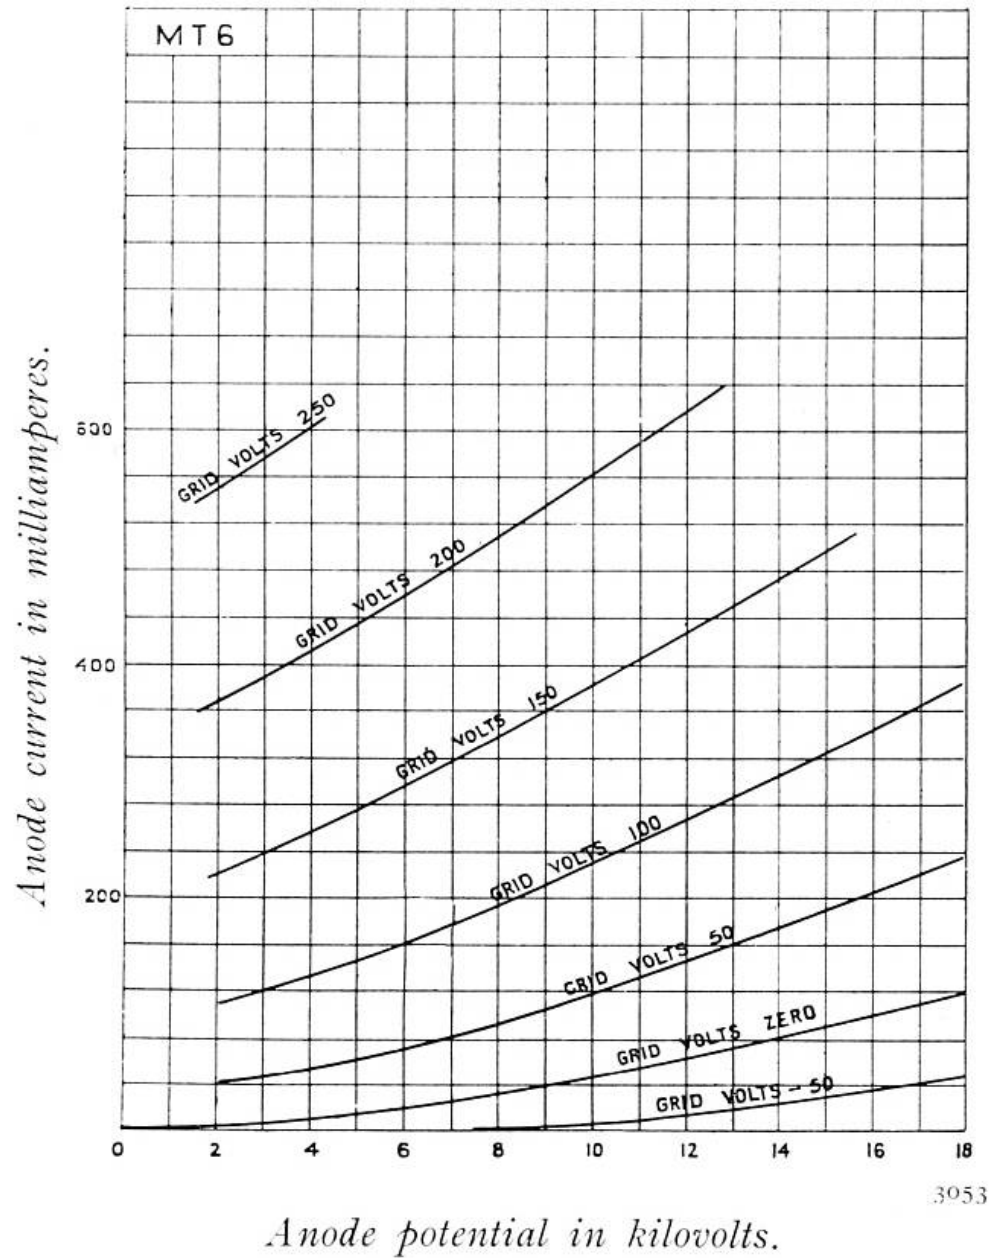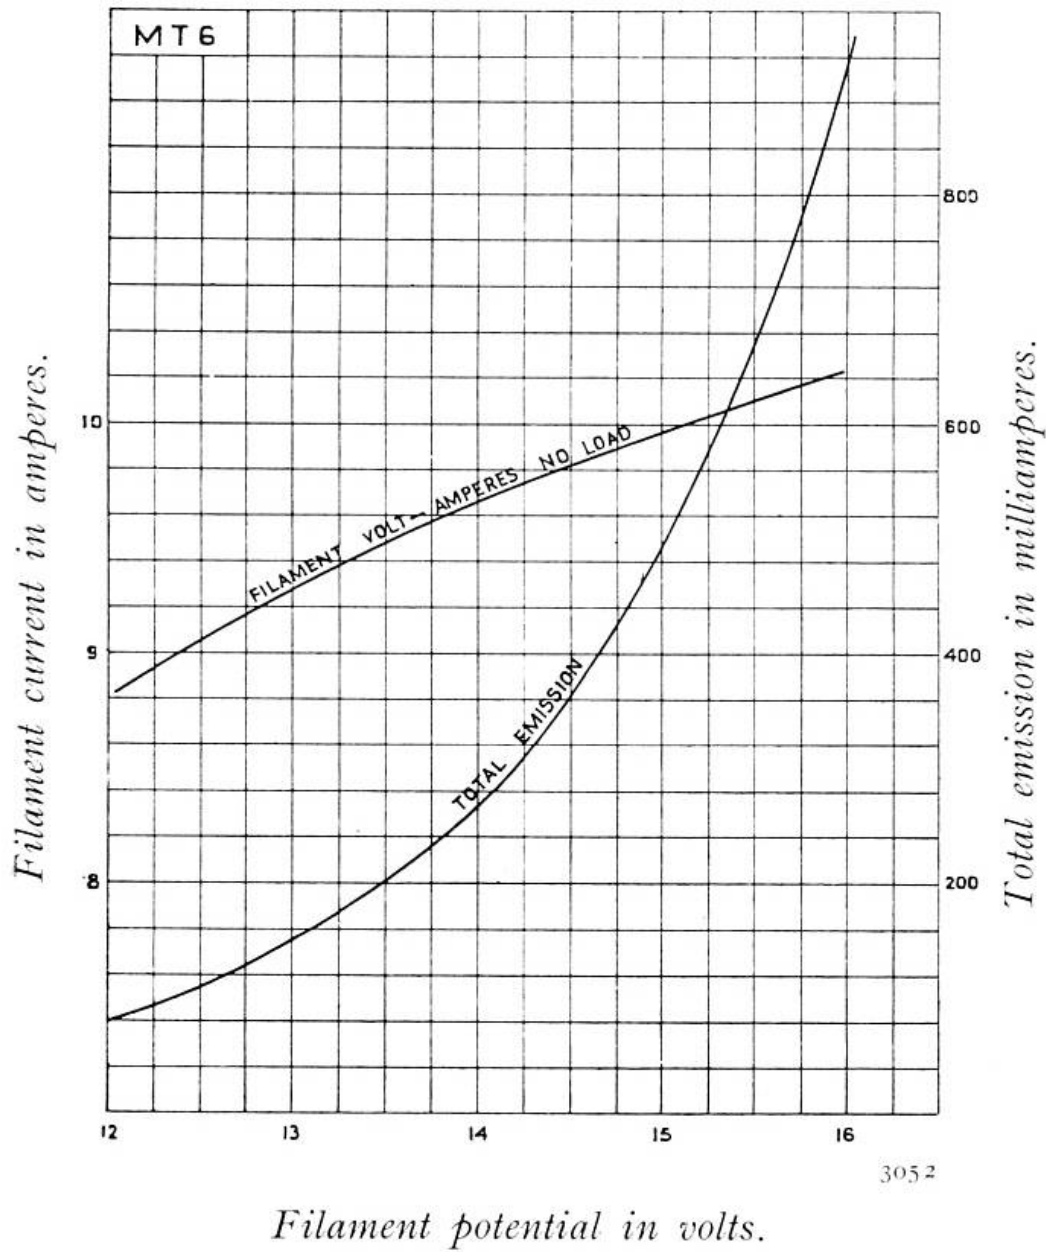

Characteristic Curves of Average Valve.

TYPE M.T.6