

Transmitting Valve

TYPE M.T.6B

(Nickel Electrodes)



2895

(Approximate overall dimensions : 380×160 m/m.)

Normal input 125 milliamperes mean anode current at 2,000 to 10,000 anode volts D.C. when used in a suitable circuit under oscillating conditions on a long wave telegraphic load in which the method of keying reduces the anode current to zero during spacing.


Continuous anode dissipation permissible under oscillatory conditions 200 watts.

Approximate Data :

Filament volts	15.5	Total emission (milliamps.)	600
Filament amperes	10.0	*Impedance (ohms) ..	15,000
Anode volts D.C. 2,000—10,000		*Amplification factor ..	30


* Taken about anode volts 3,000 and grid volts 0.

Code Word : IVHIZ

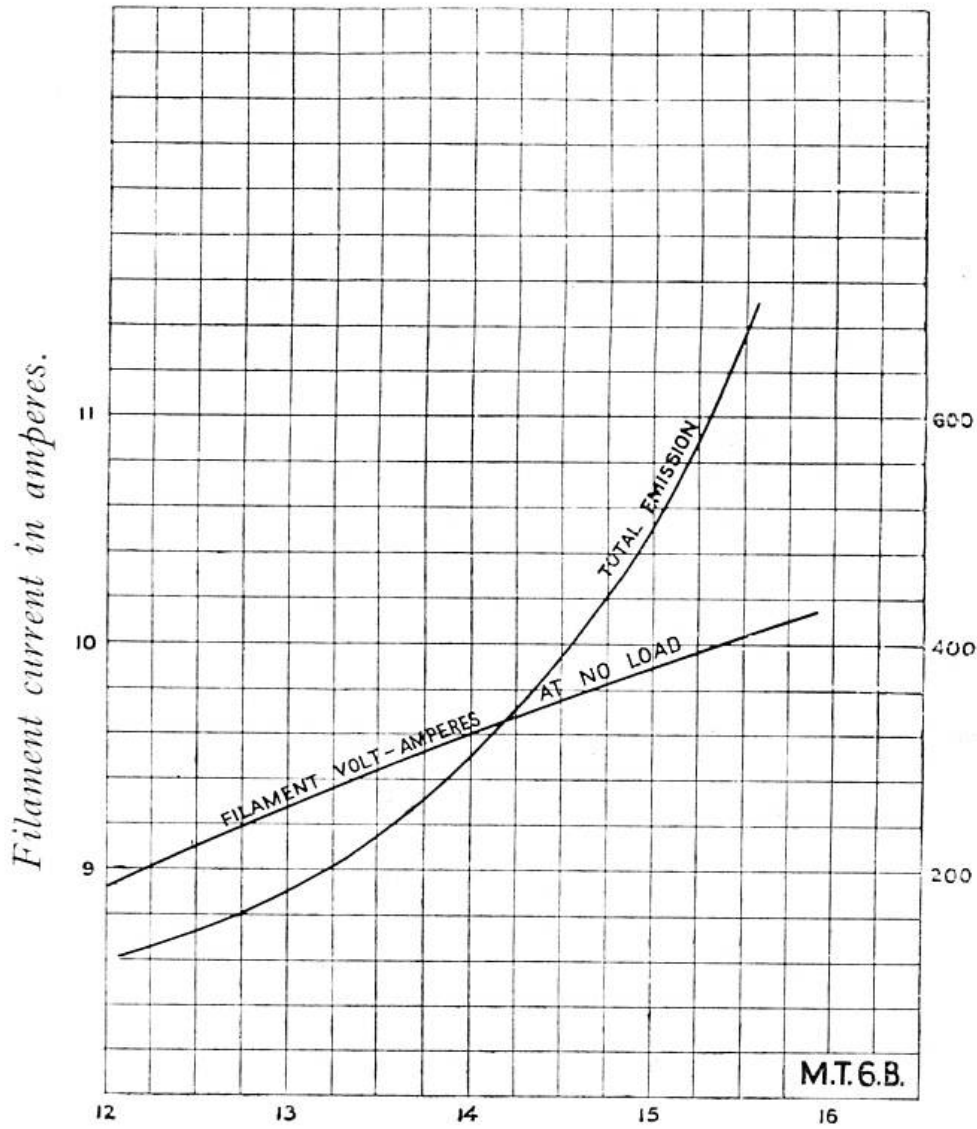

2883

Filament potential in volts.

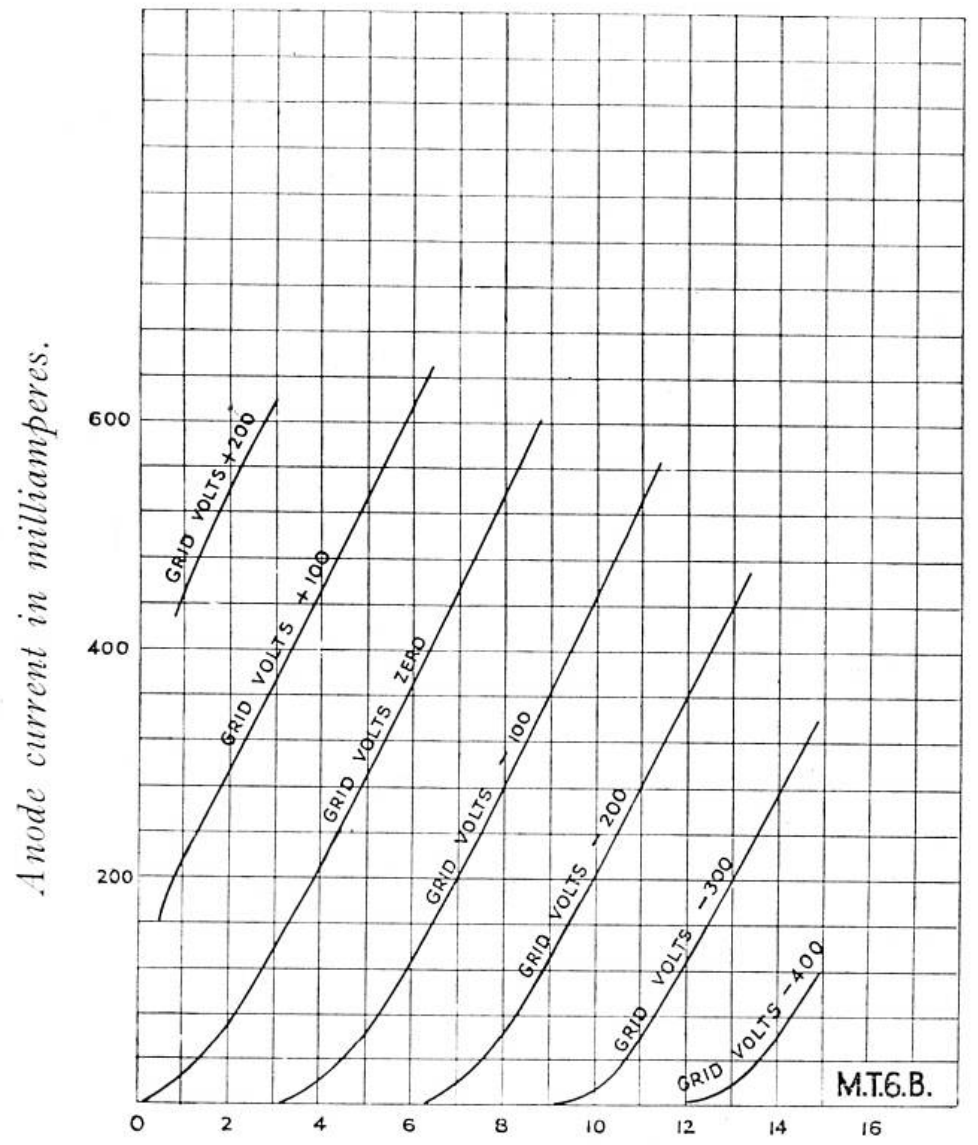

2884

Anode potential in kilovolts.

Characteristic Curves of Average Valve.

TYPE M.T.6B