

Modulating Valve

TYPE M.T.7B

(Molybdenum Electrodes)



2384A

(Approximate overall dimensions : 450 × 180 m/m.)

A modulating valve for use in telephony transmitters operating at mean anode voltages of the order of 10,000 volts D.C.



Maximum continuous anode dissipation under modulating conditions 500 watts at 10,000 volts.

Approximate Data :

Filament volts	15.0	Total emission (milliamps.)	400
Filament amperes	10.0	*Impedance (ohms) ..	30,000
Anode volts D.C.	10,000	*Amplification factor ..	35

* Taken about anode volts 10,000 and grid volts -250.

Code Word : IVHUN

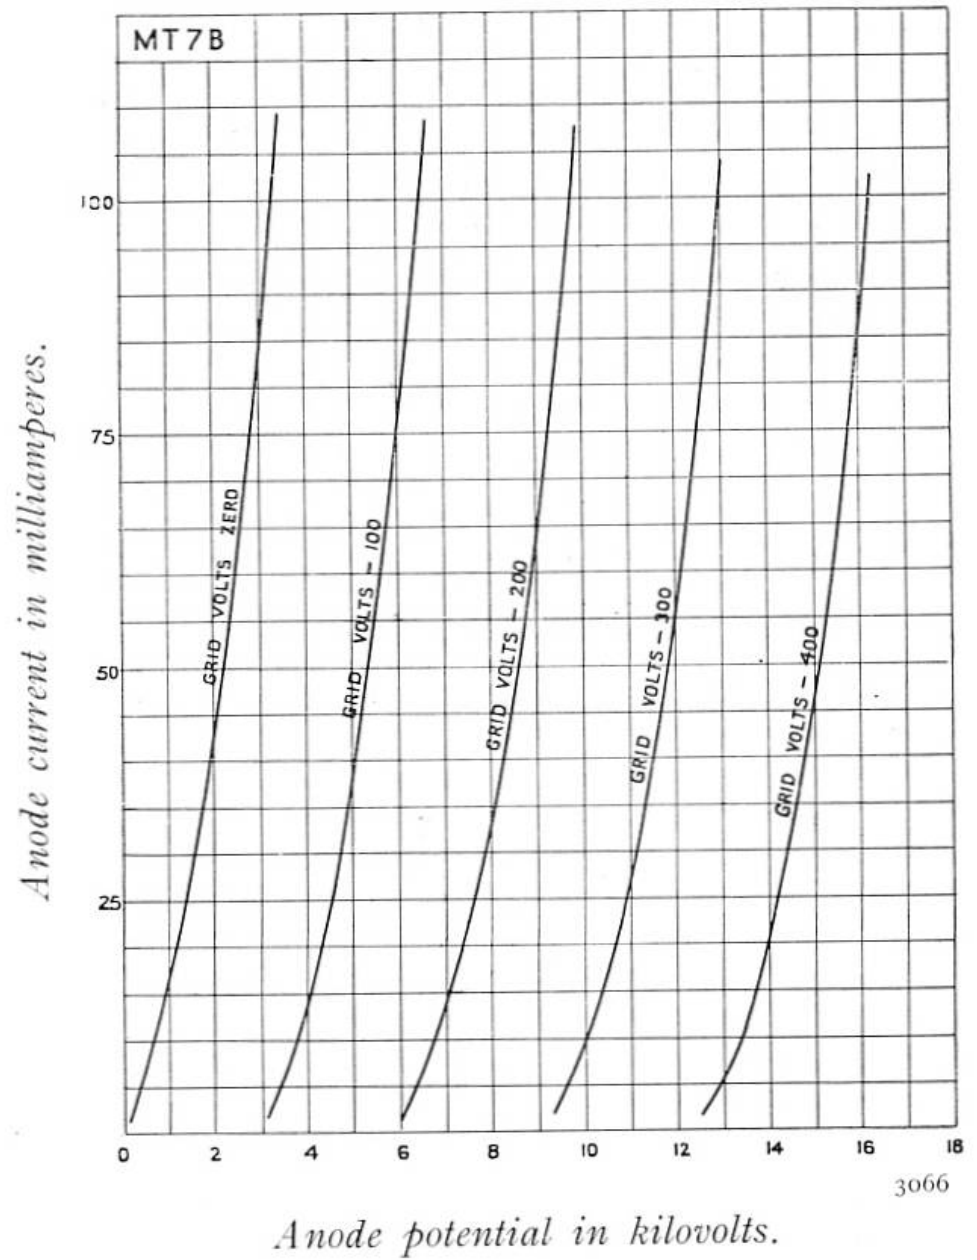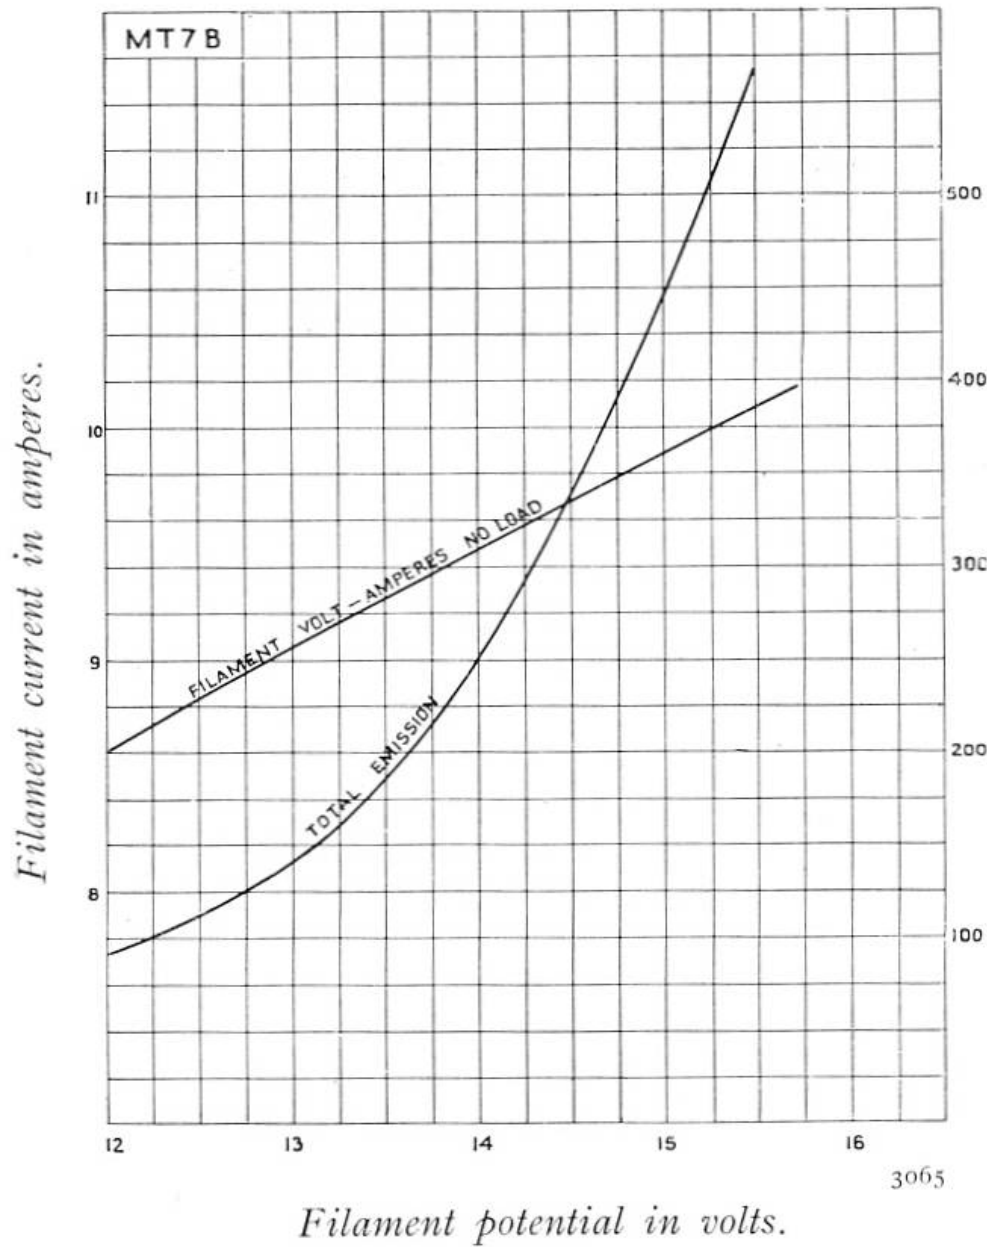

Characteristic Curves of Average Valve.

TYPE M.T.7B