

Modulating Valve

TYPE M.T.9L

(Molybdenum Electrodes)



2894

(Approximate overall dimensions : 480 × 180 m/m.)


A modulating valve for use in circuits employing low anode voltages. Maximum continuous anode dissipation under modulating conditions, 800 watts at 2,000 volts, or 700 watts at 4,000 volts.

Approximate Data :

Filament volts	17.0	Total emission (milliamps.)	600
Filament amperes	9.2	*Impedance (ohms) ..	2,500
Anode volts D.C. 2,000—4,000		*Amplification factor ..	7.5


* Taken about anode volts 2,000 and grid volts —100.

Code Word : IVIGS

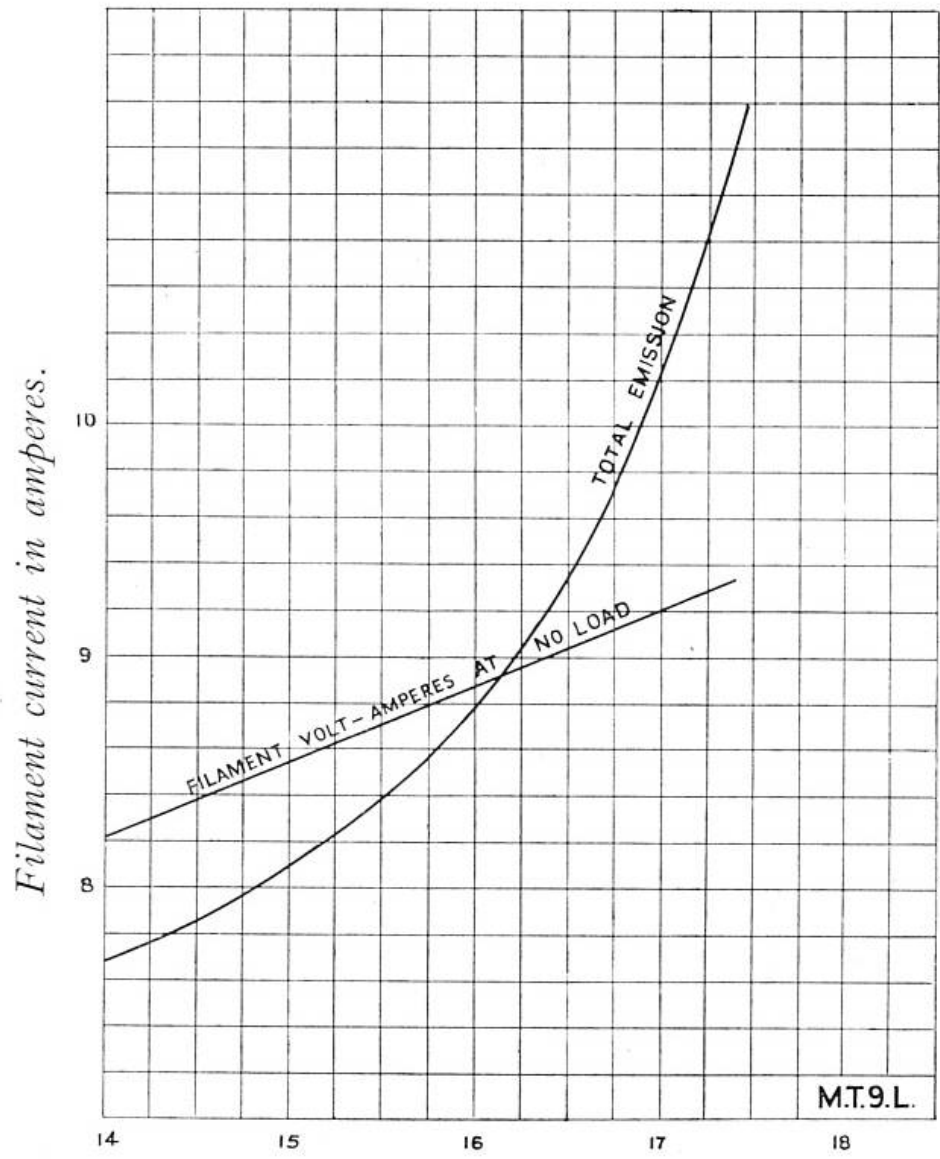

2885

Filament potential in volts.

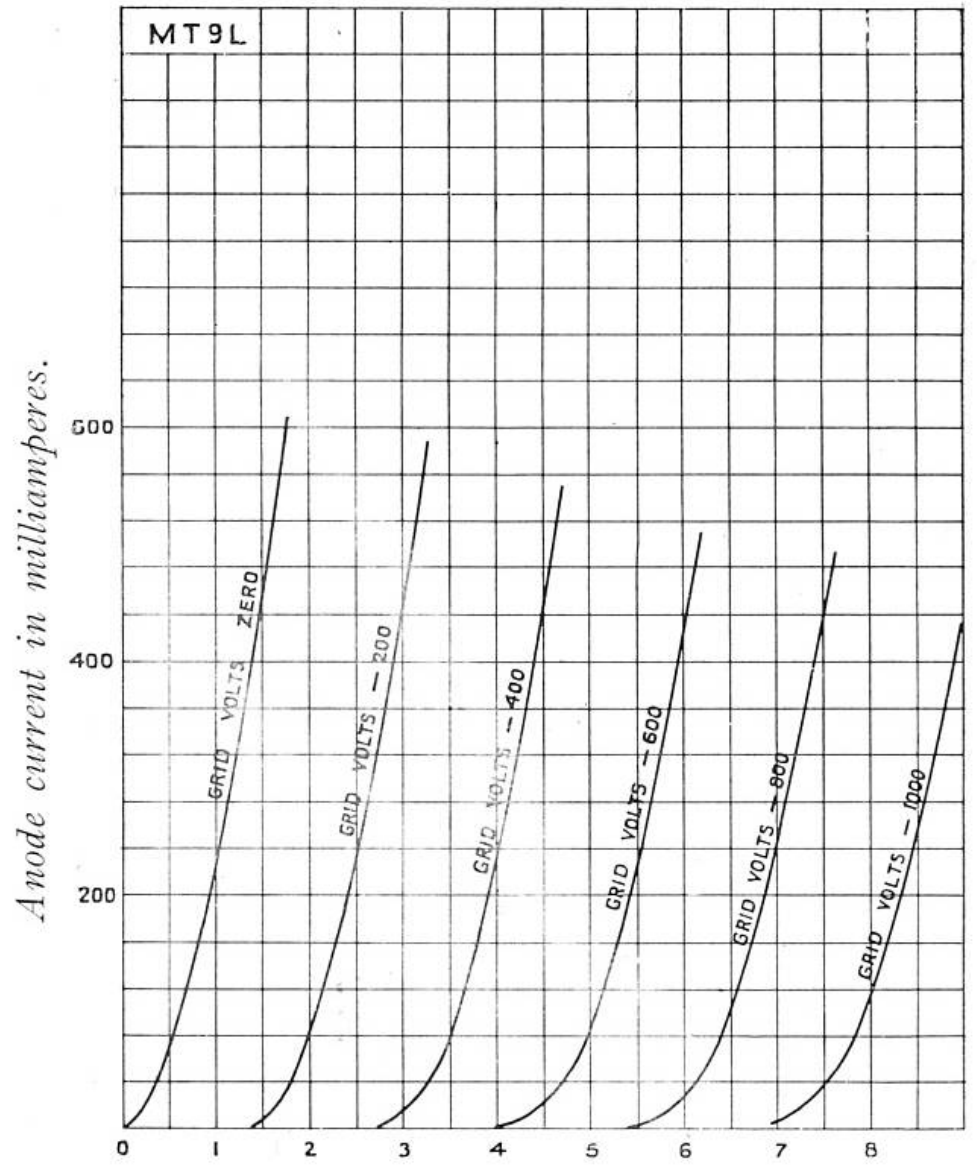

3067

Anode potential in kilovolts.

Characteristic Curves of Average Valve.

TYPE M.T.9L