


Transmitting Valve

TYPE T.50

(Nickel Electrodes)

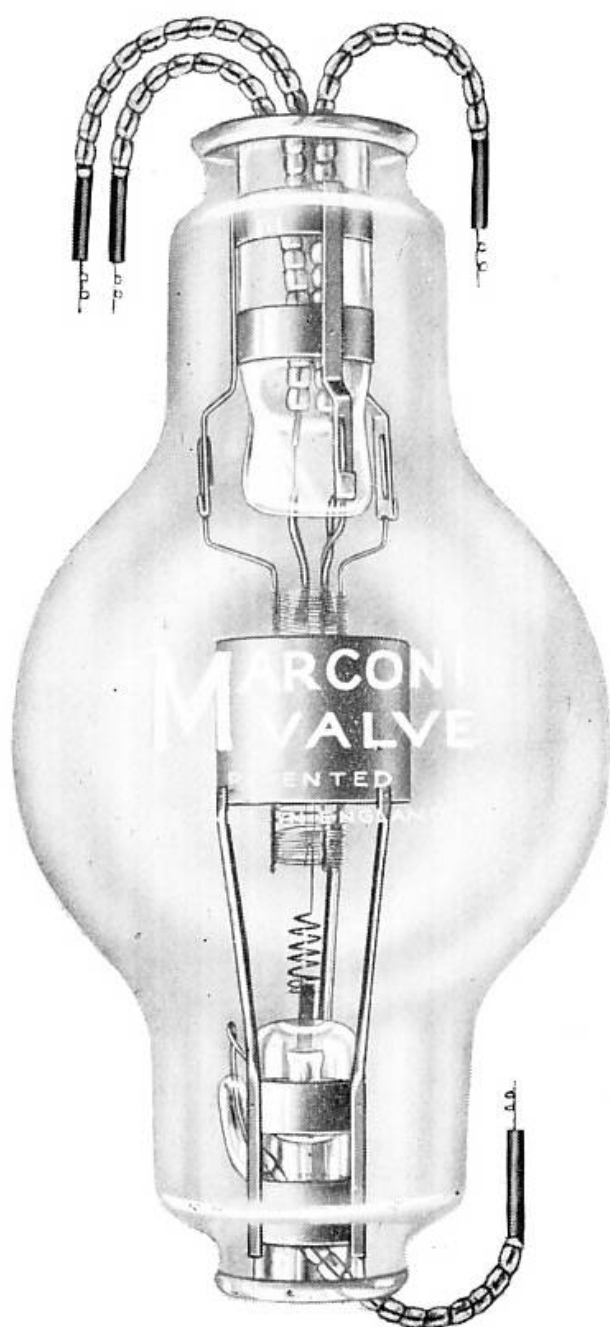

2363A

(Approximate overall dimensions : 145 × 76 m/m.)


Normal input 40 milliamperes mean anode current at 1,500 anode volts D.C. when used in a suitable circuit under oscillating conditions on a long wave telegraphic load in which the method of keying reduces the anode current to zero during spacing.

Continuous anode dissipation permissible under oscillatory conditions 25 watts.

Approximate Data :

Filament volts ..	7.0	Total emission (milliamps.)	150
Filament amperes ..	2.5	Impedance (ohms) ..	35,000
Anode volts D.C. ..	1,500	Amplification factor ..	30

Code Word : IVJOC

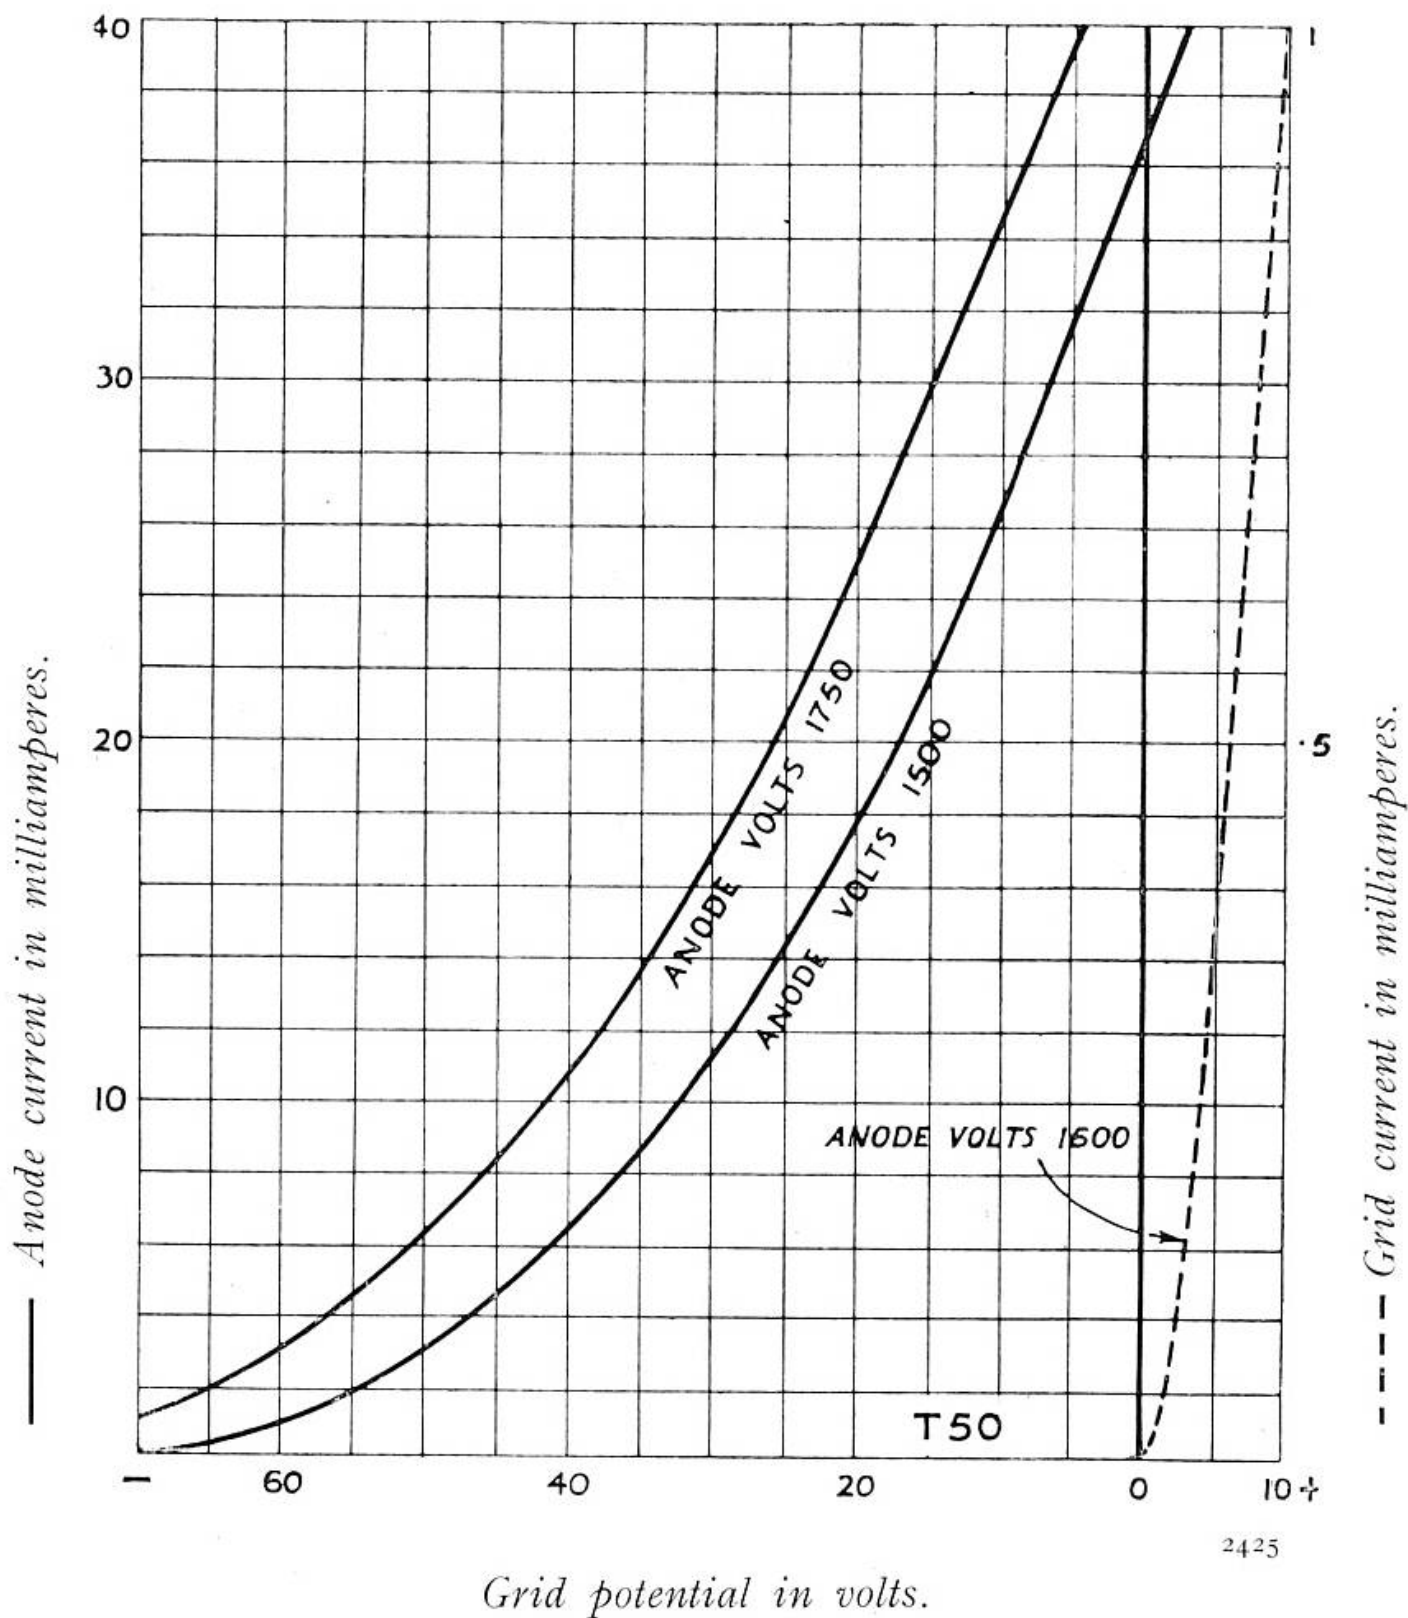

Characteristic Curves of Average Valve.

TYPE T.50