


EEV Primerless TR Limiter Tubes - X-Band

Frequency range (MHz)	Type	Peak power (kW)	Maximum leakage		Maximum V.S.W.R.	Maximum insertion loss (dB)	Maximum recovery period to -3 dB (μ s)
			Spike (nJ/pulse)	Total (mW)			
8900-9100	BS162	40	5.0	30	1.4	0.8	3.0
→ 8600-9500	BS234	200	5.0	80	1.4	1.2	3.0
8980-9180	BS500	100	5.0	30	1.4	1.0	3.0
→ 9000-9500	BS276	200	5.0	30	1.4	0.8	3.0
→ 9000-9500	BS277	200	5.0	30	1.4	0.8	3.0
9000-9500	BS968	50	5.0	30	1.3	1.0	3.0
9000-9500	BS974 ‡‡	150	5.0	30	1.3	1.0	3.0
9000-9500	BS976	Matched pair of BS968 and BS974 for use in monopulse radars.					
9000-9600	BS264	100	5.0	30	1.4	1.0	3.0
9000-9600	BS258	100	5.0	30	1.4	1.0	3.0
9250-9350	BS122	40	5.0	30	1.4	0.8	5.0
9305-9405	BS952	60	10	50	1.3	0.7	3.0
→ 9325-9425	BS217	100	5.0	30	1.4	0.8	3.0
9275-9525	BS178	40	5.0	30	1.3	0.8	3.0
9300-9500	BS188	100	5.0	20	1.3	0.8	3.0
9300-9500	BS206	100	10	30	1.4	1.0	3.0
9300-9500	BS256	100	5.0	30	1.4	0.8	1.5
9300-9500	BS260	100	5.0	30	1.4	0.8	3.0
9300-9500	BS262	100	5.0	30	1.4	0.8	3.0
9300-9500	BS280	100	5.0	30	1.4	0.8	3.0
9300-9500	BS958	40	5.0	30	1.4	0.8	3.0
9300-9500	BS959	40	6.0	50	1.4	0.8	3.0
9300-9700	BS216	40	5.0	30	1.4	0.8	3.0
9400-9700	BS232	40	5.0	30	1.4	0.8	3.0
→ 9600-9700	BS219	100	5.0	30	1.4	0.8	3.0

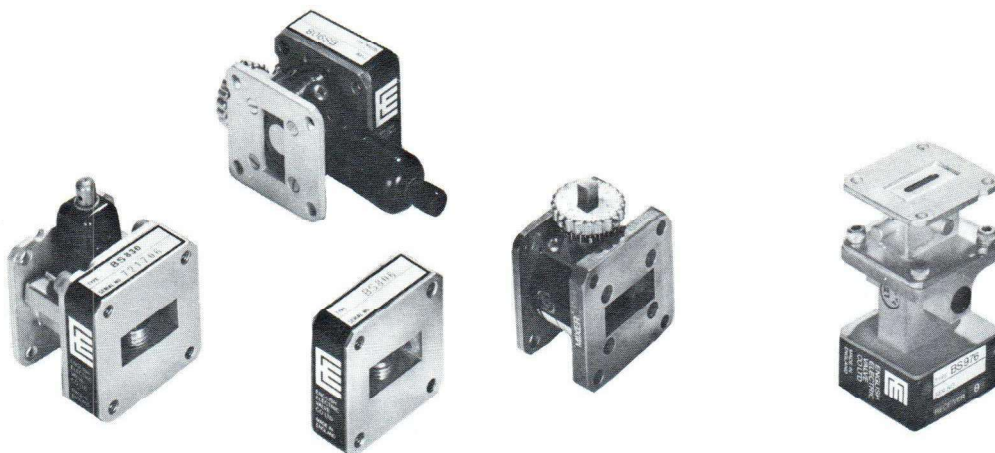

A group of Duplexer Devices

→ New type.

‡‡ Twin tube, E-plane.

◆ Tunable marine radar.

* At 3 μ s.