





COLD CATHODE RECTIFIERS

for use as a charging rectifier for pocket accumulators, for current intensity measurement in X-ray units, etc.


The cold-cathode detectors DT are used for rectifying low-voltage and high-frequency currents.

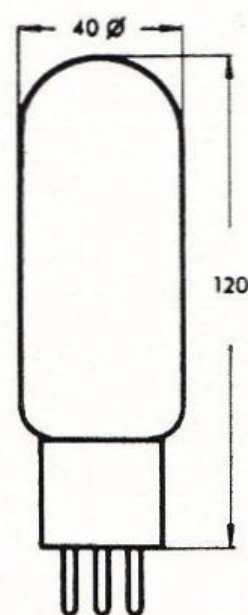


GG 38-01

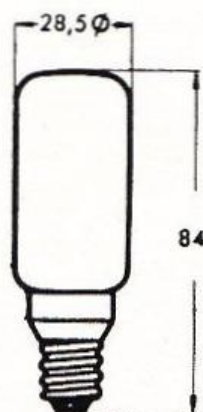

GG 38-11

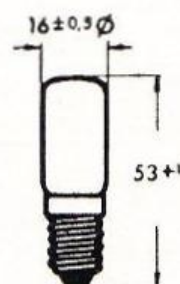

GG 38-21

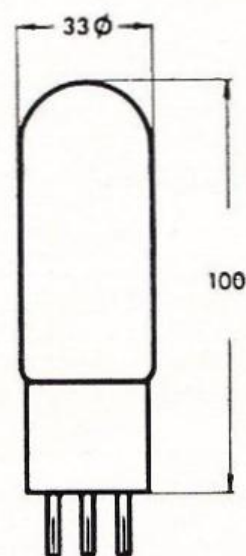

GG 39-02

Type	Operating voltage V	Consumable D. C. mA	Cap
GG 38-01	300	10	DIN 41501
GG 38-11	220	25	E 14
GG 38-21	220	5	E 14
DT 39-02	250	10	DIN 41501