


# HSD® METAL HALIDE

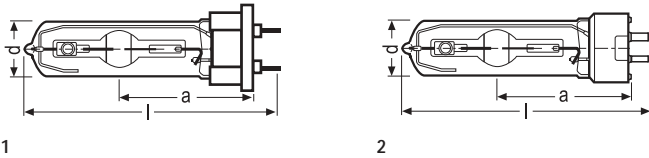

## HSD® WITH OUTER JACKET

Ordering Abbreviation	HSD 150/70	HSD 200/60	HSD 250/60	HSD 250/78	HSD 575/72
Product Number	54119	54167	54170	54118	54129
Watts (W)	150	200	250	250	575
Volts (V)	97	70	90	90	88
Current (A)	1.8	3.3	3.1	3.1	7.4
Lumens (lm)	12000	13000	17000	17000	45000
Color Temp (K)	7000	6000	6000	7800	7200
Length l (mm)	105	108	110	108	135
Distance a (mm)	56	55	55	55	65
Diameter d (mm)	20	23	23	23	30
Electrode Gap - cold (mm)	5.5	5	5	5	7
Avg Rated Life (hrs)	2000	2000	2000	3000	3000
Operating Position	Any	Any	Any	Any	Any
Base	G12	GY9.5	GY9.5	GY9.5	GX9.5
Hot Restart	No	No	No	No	No
Fig No	1	2	2	2	2
Symbols & Footnotes	4,23	4	4,24	4	4