

Rectifying Valve

TYPE M.R.1

(Nickel Electrodes)



2343A

(Approximate overall dimensions : 185 × 100m/m.)

A two-electrode rectifying valve, tested dissipating, 200 watts at the anode, suitable for voltages up to 10,000.



Continuous anode dissipation permissible in operation 100 watts.

Approximate Data :

Filament volts	9.0	Total emission (milliamps.)	350
Filament amperes	5.75	*Impedance (ohms)	1,500
Anode volts	10,000		

* Taken about anode volts 200.

Code Word : IVLOG

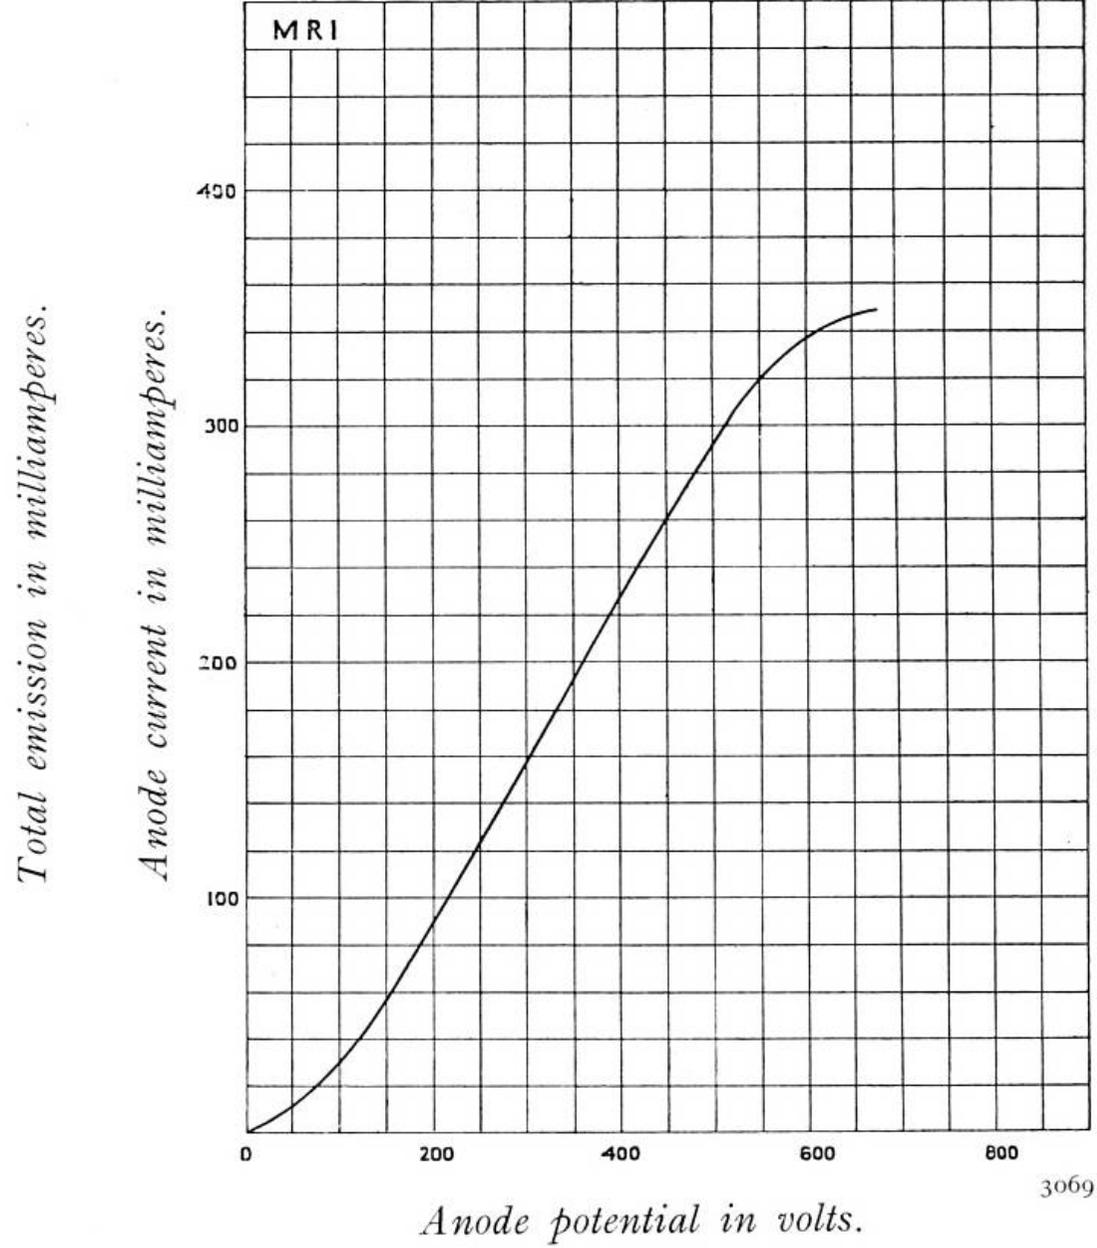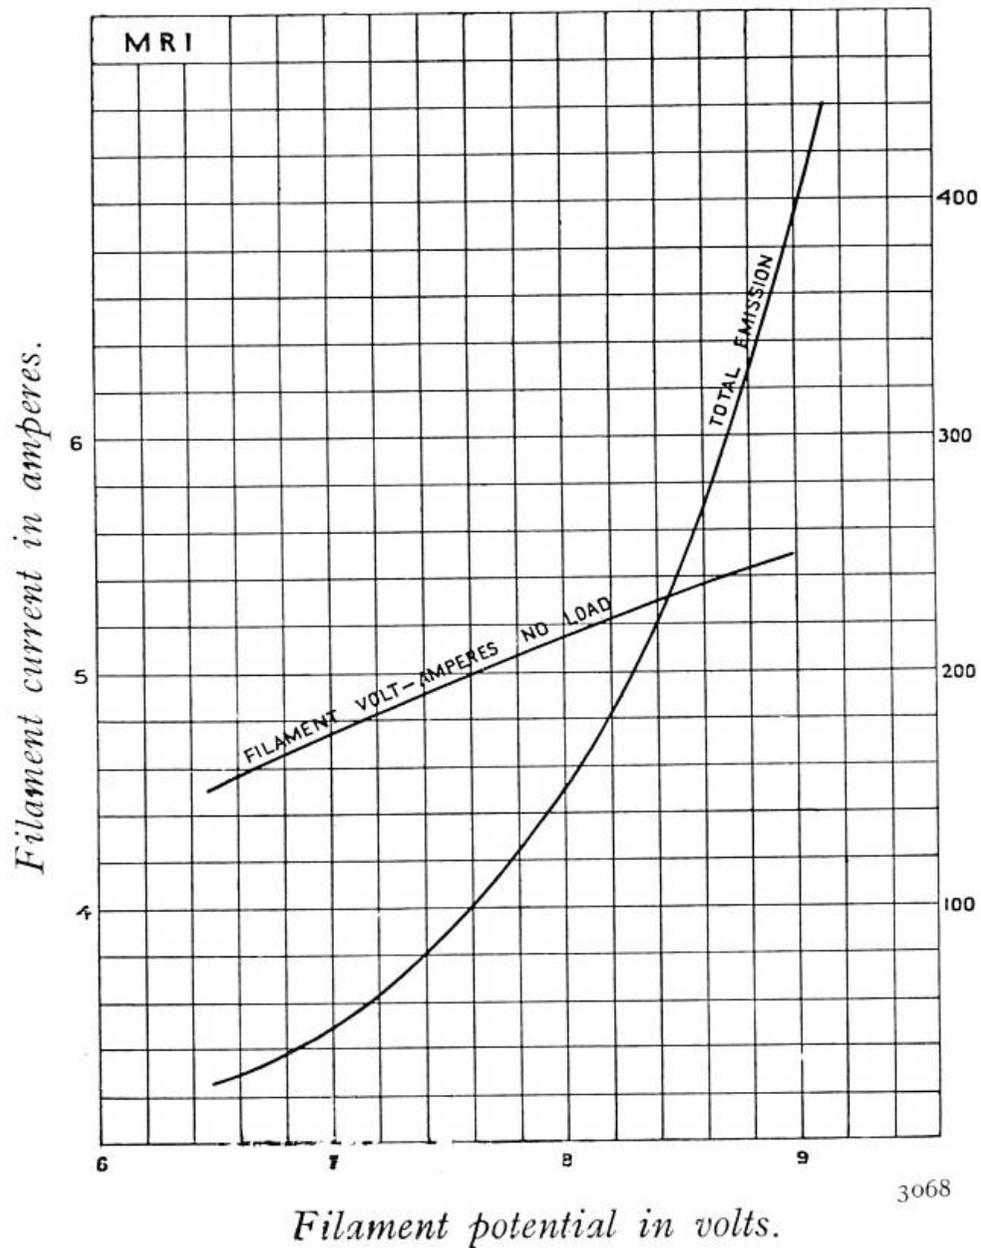

Characteristic Curves of Average Valve.

TYPE M.R.I