


2.5 - 4 - 5 AND 6 V
0.5 - 6.5 A




5 A

6 V

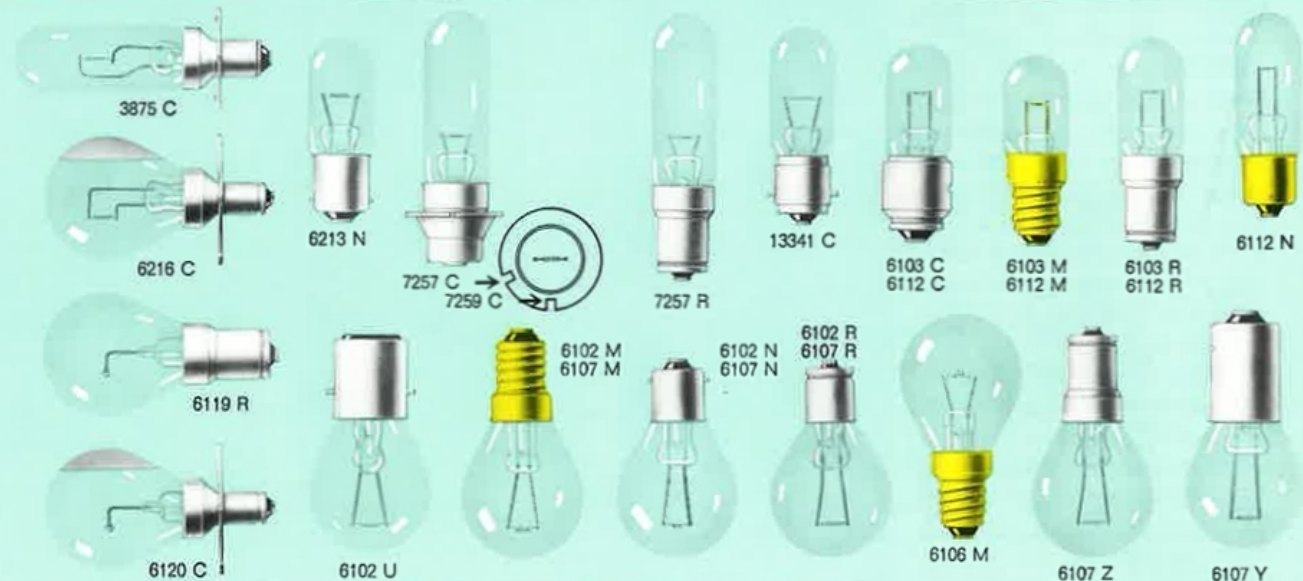


0.2 - 17 A

6 - 27 V

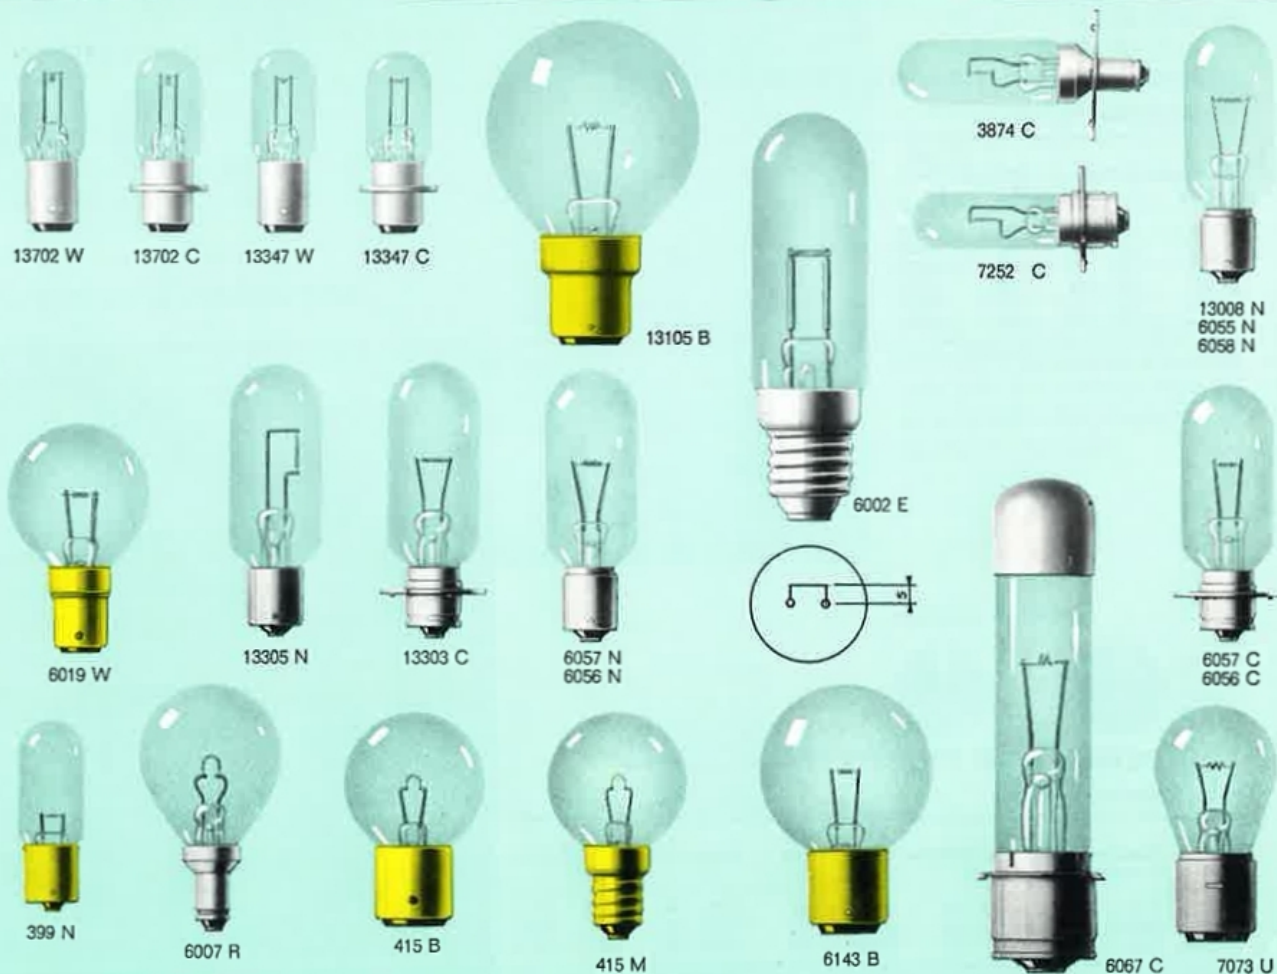

SOUND-FILM EXCITER, HOME-CINEMA AND MICROPROJECTION LAMPS

The quality of this category of lamps is determined by the filament. Philips bestow, therefore, the utmost care on the manufacture of perfect filaments with small tolerances in their dimensions.

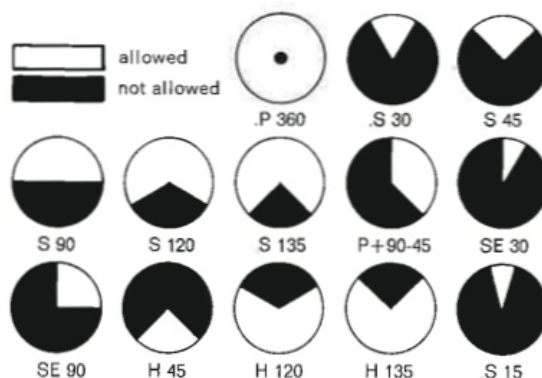

Catalogue number	Voltage V	Wattage W	Current A	Fil. dim. mm	Lum. flux lm	Av. life h	Base	Diam.	Overall length	Lcl.	Burning position
6218C	2.5	—	3	1 x 1	50	100	P15s	16	50	28.6	P360
7090C	4	—	0.75	0.2 x 2	30	50	P15s	16	59	28.6	P360
7253N	4	—	0.75	2 x 0.2	30	50	B15s	16	49	31.8	P360
7253C	4	—	0.75	2 x 0.2	30	50	P15s	16	49	28.6	P360
7250C	4	—	0.75	2 x 0.2	30	50	P15d	25	51	28.6	H120
7251C	5	—	4	0.6 x 6.5	245	1000	PX28s	18	70	31.5	P+90-45
13353N	5	—	4	1.1 x 1.1	310	100	B15s	25	49	31.8	H45
7255C	5	—	6.5	1 x 5	700	100	P15s	25	78	41.2	S135
390C	6	—	0.5	1.2 x 0.2	42	50	P10s	15	63	25	S15
3873C	6	—	0.8	0.046 x 16	25	100	PX28s	18	71	31.5	P360
6142N	6	—	1	0.25 x 4	80	100	B15s	16	42	22	P360
7210N	6	—	1	0.25 x 4	80	100	B15s	16	49	29.5	S45
7210C	6	—	1	0.25 x 4	80	100	P15s	16	49	28.6	S45
6052M	6	—	1.45	1 x 1.5	95	100	E14	18.5	60	43.5	SE90
3871C	6	—	1.45	0.073 x 20	80	100	PX40s	28	74	31.5	P360
6100M	6	—	4.35	4.5 x 0.8	440	100	E14	35	65	8.5	H120
397M	6	—	4.5	3 x 1	475	100	E14	40	67	8.5	H120
3875C	6	—	5	1 x 5	525	100	PX28s	18	70	31.5	P+90-45
6216C	6	—	5	1 x 5.4	525	100	PY40s	32	62	29	P+90-45
6213N	6	—	5	5 x 1	525	100	B15s	18.5	54	28	S30
7257C	6	—	5	2.5 x 1.5	510	100	P27s	18	72	22	S30
7259C	6	—	5	2.5 x 1.5	510	100	P27s	18	72	22	S30
7257R	6	—	5	2.5 x 1.5	510	100	SX15s	18	72	38	S30
13341C	6	—	5	5 x 1	525	100	P16s	18.5	55	28	S30
6103C	6	—	5	2.5 x 1.5	510	100	PY20s	18.5	58	25.5	S30
6112C	6	—	5	5 x 1	525	100	PY20s	18.5	58	25.5	S30
6103M	6	—	5	2.5 x 1.5	510	100	E14	18.5	60	40.5	S30
6112M	6	—	5	5 x 1	525	100	E14	18.5	60	40.5	S30
6103R	6	—	5	2.5 x 1.5	510	100	SX15s	18.5	58	41	S30
6112R	6	—	5	5 x 1	525	100	SX15s	18.5	58	41	S30
6112N	6	—	5	5 x 1	525	100	B15s	18.5	58	34	S30
6112X	6	—	5	5 x 1	525	100	B15s	18.5	54	28	S30
7254R	6	—	5	2.5 x 1.5	510	100	SX15s	18	72	41	S30
6119R	6	—	5	2.5 x 1.5.5	510	100	SX15s	32	64	43.5	P+90-45
6120C	6	—	5	2.5 x 1.5.5	510	100	PX40s	32	62	29	P+90-45
6102U	6	—	5	2.5 x 1.5	510	100	BA20d	35	63	8.5	H120
6102M	6	—	5	2.5 x 1.5	510	100	E14	35	65	8.5	H120
6107M	6	—	5	4 x 1	525	100	E14	35	65	8.5	H120
6102N	6	—	5	2.5 x 1.5	510	100	B15s	35	60	8.5	H120
6107N	6	—	5	4 x 1	525	100	B15s	35	60	8.5	H120
6102R	6	—	5	2.5 x 1.5	510	100	SX15s	35	60	8.5	H120
6107R	6	—	5	4 x 1	525	100	SX15s	35	60	8.5	H120
6106M	6	—	5	2 x 2	510	100	E14	35	65	45	S135
6107Z	6	—	5	4 x 1	525	100	SX15s	35	64	8.5	H120
6107Y	6	—	5	4 x 1	525	100	P20s	35	67	45.5	H120
6107X	6	—	5	4 x 1	525	100	B15s	35	64	8.5	H120
6164M	6	—	5	2 x 2	510	100	E14	40	67	45	P360
13702W	6	15	—	1.9 x 1.7	205	100	BA15d	18.5	53	6.5.5	H135
13702C	6	15	—	1.9 x 1.7	205	100	PX22d	18.5	53	6.5.5	H135
13347W	6	15	—	1.9 x 1.7	205	100	BA15d	18.5	53	6.5.5	H135
13347C	6	15	—	1.9 x 1.7	205	100	PX22d	18.5	53	6.5.5	H135
13105B	6	100	—	3 x 3	2000	100	B22d	60	92	53.5	S135
6002E	6	—	16 - 17	8.5 x 2.1	1400	100	E27	32	118	76	S30
3874C	6.5	—	1.48	0.5 x 3	110	500	PX28s	18	70	31.5	P+90-45
7252C	7	—	0.2	0.15 x 3.5	10	50	P15s	16	60	28.6	P360
13008N	8	—	2	6 x 0.6	300	1000	B15s	25	78	44.5	S135
6055N	8	—	4	7.5 x 0.5	625	100	B15s	25	78	44.5	S135
6114N	8	—	4	7.5 x 0.5	625	100	B15s	25	78	49.5	S135
6019M	8	—	6	2.5 x 2	900	100	E14	40	67	45	P360
6019W	8	—	6	2.5 x 2	900	108	B15d	40	67	39	P360
6058N	8.5	—	4	8 x 0.5	680	100	B15s	25	78	44.5	S135
6136N	8.5	—	4	8 x 0.5	680	100	B15s	25	78	49.5	S135
13305N	8.5	—	4	0.5 x 8.4	680	100	B15s	25	78	44.5	SE30
13303C	9	—	4	5 x 1.25	575	500	P15s	25	78	37.3	S135
6057N	10	—	5	4.5 x 1.5	1050	100	B15s	25	78	40.5	S135
6057C	10	—	5	4.5 x 1.5	1050	100	P15s	25	78	37.3	S135
6057V	10	—	5	4.5 x 1.5	1050	100	B17s	25	78	31.5	S135
6138N	10	—	5	4.5 x 1.5	1050	100	B15s	25	78	43	S30
6056N	10	—	7.5	4.5 x 2	1650	100	B15s	25	78	40.5	S30
6056C	10	—	7.5	4.5 x 2	1650	100	P15s	25	78	37.3	S30
6056V	10	—	7.5	4.5 x 2	1650	100	B17s	25	78	31.5	S30
399N	12	—	0.5	2 x 0.9	120	100	B15s	18.5	54	20	S30
6007R ¹⁾	12	—	2	3.5 x 2	550	25	S9.5s	40	66	43.5	S90
415B	12	—	3.5	4.5 x 2	880	100	B22d	40	62	37	S90
415M	12	—	3.5	4.5 x 2	880	100	E14	40	67	45	S90
6143B	12	50	—	2.5 x 2.5	1125	100	B22d	48	71	38.5	S135
6067C	12	100	—	2.6 x 3.3	2550	100	P28s	25.5	135	55.6	S15
7073U	15	60	—	2.6 x 2.4	1560	20	BA20d	35	66	30	S120
392N	25	—	1	3.5 x 1.2	450	100	B15s	18.5	54	20	S30
6139N	27	—	1	3.5 x 1	445	100	B15s	25	78	40.5	S135

¹⁾ Can also be supplied with outside mirror.
²⁾ Distance from filament to bottom of bulb.

³⁾ Exc. 4.8 mm.
⁴⁾ Exc. 6 mm.
⁵⁾ Exc. 8 mm.
⁶⁾ Exc. 5 mm.

