


# SOUND FILM EXCITER LAMPS

These lamps are specially designed to reproduce sound by illuminating the sound track of motion picture films. To obtain satisfactory reproduction it is essential that dimensions and shape of the lamp filament meet the requirements of the sound optical system, the electrical characteristics of the lamps are also of vital importance.

BURNING  
POSITIONS

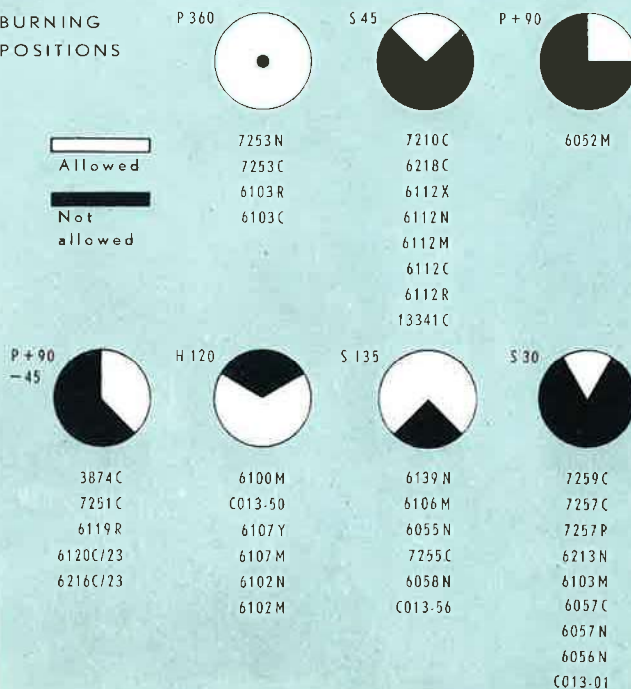

SCALE 1:2

Catalogue number	Voltage	Current A	Lumens	Average life hrs.	Filament Exc.	Cap	Diam.	Ovl.	Lcl.
7253 N	4	0.75	30	50	4.8	BA 15s	15	50	31.8 ± 0.8
7253 C	4	0.75	30	50		P 15s	15	50	28.6 ± 0.25
7210 C	6	1	80	100		P 15s	15	50	28.5 ± 0.25
6218 C	2.5	3	50	100		P 15s	15	50	28.6 ± 0.25
6052 M	ca. 6	1.45	95	100		E 14	18.5	60	43.5 ± 1
3874 C	ca. 6.5	1.48	110	500		PG 28	18	74	31.5 ± 0.2
7251 C	ca. 5	4	245	1000		PG 28	18	74	31.5 ± 0.2
6100 M	6	4.35	440	100		E 14	34	65	8 ± 1*)
C 013-56	8.5	3.3	100	100		S 15d	34	57	37 ± 1
6139 N	27	1	445	100		BA 15s	26	75	40.5 ± 0.5
6107 Y	6	5	525	100	S 20s	34	67	8 ± 1*)	
6107 M	6	5	525	100	E 14	34	65	8 ± 1*)	
6102 N	6	5	510	200	BA 15s	34	60	8 ± 1*)	
6102 M	6	5	510	200	E 14	34	65	8 ± 1*)	
C 013-50	6	5	510	200	E 14	34	65	5 ± 1*)	
7259 C	6	5	510	100	PG 27	18	75	22 ± 0.5	
7257 C	6	5	510	100	PG 27	18	75	22 ± 0.5	
7257 R	6	5	510	100	S 15s	18	75	38 ± 1	
6213 N	6	5	525	100	BA 15s	18.5	54	28 ± 1	
6106 M	6	5	510	100	E 14	34	65	45 ± 1.5	
6119 R	6	5	510	100	S 15s	32	65	43.5 ± 1	
6120 C/23	6	5	510	100	6 ± 0.5	PG 40I	32	63	29 ± 0.25
6216 C/23	6	5	525	100	6 ± 0.5	PG 40I	32	63	29 ± 0.25
3875 C	6	5	525	100	PG 28	18	74	31 ± 0.2	
6103 M	6	5	510	100	E 14	18	59.5	40.5 ± 1	
6103 R	6	5	510	100	S 15s	18	58	41 ± 1	
6103 C	6	5	510	100	PG 20	18	58	25.5 ± 0.4	
6112 X	6	5	525	100	BA 15s	18	54	28 ± 1	
6112 N	6	5	525	100	B 15s	18	58	41 ± 1	
6112 M	6	5	525	100	E 14	18	59.5	40.5 ± 1	
6112 C	6	5	525	100	PG 20	18	58	25.5 ± 0.4	
6112 R	6	5	525	100	S 15s	18	58	41 ± 1	
13341 C	6	5	450	100	PG 16s	18	55	28 ± 0.2	
6055 N	8	4	625	100	BA 15s	26	75	44.5 ± 0.5	
7255 C	5	6.5	700	100	P 15s	26	75	41.2 ± 0.25	
6058 N	8.5	4	680	100	BA 15s	26	75.5	44.5 ± 0.5	
6057 C	10	5	1050	100	P 15s	26	75	33.7 ± 0.25	
6057 N	10	5	1050	100	BA 15s	26	75	40.5 ± 0.5	
6056 N	10	7.5	1650	100	BA 15s	26	75	40.5 ± 0.5	
C 013-01	10	10	2550	25	S 15s	26	75	48 ± 1	



A 48

