

Product datasheet

HQI-TS 400 W/D

POWERSTAR HQI-TS | Metal halide lamps with quartz technology for enclosed luminaires



- Foyers, reception areas Factory and hall lighting with low-cost installations Exhibition halls and trade fairs Sports halls and multi-purpose halls Pedestrian zones, public squares Parks and gardens Buildings, monuments, bridges Approved only for use in enclosed luminaires Outdoor applications only in suitable luminaires

- High efficiency Uniform distribution of light Good to excellent color rendering Long lifetime Hot restrike capable UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter
- Product features POWERSTAR® quartz technology Light colors: warm white (WDL), neutral white (NDL), daylight (D) Product benefits High efficiency Uniform distribution of light Good to excellent color rendering Long lifetime Hot restrike capable UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter Areas of application Foyers, reception areas Factory and hall lighting with low-cost installations Exhibition halls and trade fairs Sports halls and multi-purpose halls Pedestrian zones, public squares Parks and gardens Buildings, monuments, bridges Approved only for use in enclosed luminaires Outdoor applications only in suitable luminaires



Product datasheet

Technical data

Electrical data

Nominal wattage	400.00 W
Rated wattage	400.00 W
Lamp current	4.0 A
PFC capacitor at 50 Hz	45 μ F ¹⁾
Nominal voltage	118 V
Ignition voltage	4.0 kVp;25 kVp ²⁾



¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

²⁾ Minimum;Maximum

Photometrical data

Rated lamp efficacy (standard condition)	83 lm/W
Rated luminous flux	35000 lm
Color rendering index Ra	93
Color temperature	5500 K
Light color	955
Rated LLMF at 2,000 h	0.70
Rated LLMF at 4,000 h	0.60
Rated LLMF at 6,000 h	0.55
Rated LLMF at 8,000 h	0.52
Rated LLMF at 12,000 h	0.50
UV protection	Yes

Dimensions & weight



Diameter	33.0 mm
Length	206.0 mm
Light center length (LCL)	103.0 mm

Product datasheet

Product weight	88.00 g
----------------	---------

Temperatures & operating conditions

Maximum permitted outer bulb temperature	750 °C
Maximum permitted pinch temperature	300 °C

Lifespan

Rated lamp survival factor at 2,000 h	0.80
Rated lamp survival factor at 4,000 h	0.70
Rated lamp survival factor at 6,000 h	0.60
Rated lamp survival factor at 8,000 h	0.55
Rated lamp survival factor at 12,000 h	0.50
Lifespan B50	12000 h

Additional product data

Base (standard designation)	Fc2
Product remark	With NAV control gear
Design / version	Clear
Mercury content	40.0 mg
Appropriate disposal acc. to WEEE	Yes

Capabilities

Dimmable	No
Burning position	p45
Enclosed luminaire required	Yes
Hot restart	Yes

Certificates & standards


Energy efficiency class	A
Energy consumption	462 kWh/1000h

Country specific categorizations



ILCOS	MD/UB-400/856-H/E/SL-Fc2-25/162/H
-------	-----------------------------------

Product datasheet

Light Distribution

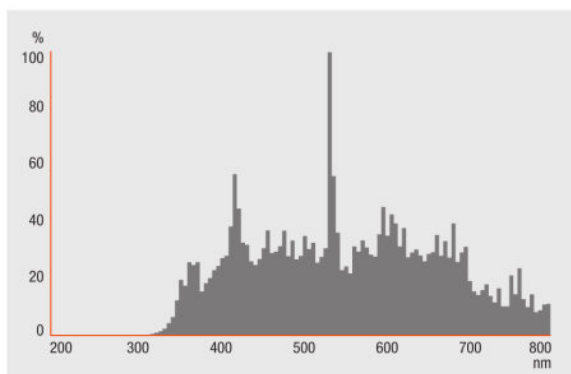

Spectral power distribution

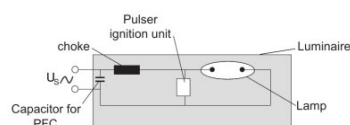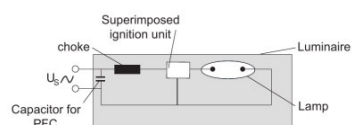

Circuit diagram

Circuit diagram

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321689191	HQI-TS 400 W/D	Shipping carton box 12 Pieces Sleeves	216 mm x 166 mm x 272 mm	9.75 dm ³	1464.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany